


## Current Transducer LF 205-S/SP5

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic separation between the primary circuit and the secondary circuit.



$$I_{PN} = 100 \text{ A}$$



### Features

- Closed loop (compensated) current transducer using the Hall effect
- Insulating plastic case recognized according to UL 94-V0.

### Special features

- $I_{PN} = 100 \text{ A}$
- $I_{PM} = 0 \dots \pm 200 \text{ A}$
- $N_P/N_S = 1 : 1000$
- Connection to secondary circuit on MOLEX MINIFIT Jr 5566 with gold-plated pins.

### Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

### Applications

- Single or three phase inverter
- Propulsion and braking chopper
- Propulsion converter
- Auxiliary converter
- Battery charger.

### Application domain

- Railway (fixed installations and onboard).

### Electrical data

$I_{PN}$	Primary nominal RMS current	100	A
$I_{PM}$	Primary current, measuring range	0 ... $\pm 200$	A
$R_M$	Measuring resistance @	$T_A = 70^\circ\text{C}$ $T_A = 85^\circ\text{C}$ $R_{M \min}$ $R_{M \max}$ $R_{M \min}$ $R_{M \max}$	
	with $\pm 12 \text{ V}$	@ $\pm 100 \text{ A}_{\max}$	0   95   15   94 $\Omega$
		@ $\pm 150 \text{ A}_{\max}$	0   59   15   58 $\Omega$
		@ $\pm 200 \text{ A}_{\max}$	0   40   15   39 $\Omega$
	with $\pm 15 \text{ V}$	@ $\pm 100 \text{ A}_{\max}$	16   123   47   122 $\Omega$
		@ $\pm 150 \text{ A}_{\max}$	16   78   47   77 $\Omega$
		@ $\pm 200 \text{ A}_{\max}$	16   55   47   54 $\Omega$
$I_{SN}$	Secondary nominal RMS current	100	mA
$N_P/N_S$	Turns ratio	1 : 1000	
$U_C$	Supply voltage ( $\pm 5\%$ )	$\pm 12 \dots 15$	V
$I_C$	Current consumption @ $\pm 15 \text{ V}$	$17 + I_S$	mA

### Accuracy - Dynamic performance data

$\varepsilon_{\text{tot}}$	Total error	@ $I_{PN}, T_A = 25^\circ\text{C}$	$\pm 0.6$	%
$\varepsilon_L$	Linearity error		< 0.1	%
$I_O$	Offset current @ $I_P = 0, T_A = 25^\circ\text{C}$	Typ	Max	mA
$I_{OM}$	Magnetic offset current <sup>1)</sup> @ $I_P = 0$ and specified $R_M$ , after an overload of $3 \times I_{PN}$		$\pm 0.2$	mA
$I_{OT}$	Temperature variation of $I_O$	$-40^\circ\text{C} \dots +85^\circ\text{C}$	$\pm 0.25$ $\pm 0.65$	mA
$t_{D10}$	Delay time to 10 % of the final output value for $I_{PN}$ step < 500			ns
$t_{D90}$	Delay time to 90 % of the final output value for $I_{PN}$ step <sup>2)</sup> < 1			$\mu\text{s}$
$BW$	Frequency bandwidth ( $-3 \text{ dB}$ )	DC ... 100		kHz

### General data

$T_A$	Ambient operating temperature	$-40 \dots +85$	$^\circ\text{C}$
$T_{A \text{ st}}$	Ambient storage temperature	$-40 \dots +90$	$^\circ\text{C}$
$R_S$	Resistance of secondary winding @ $T_A = 70^\circ\text{C}$	10	$\Omega$
	@ $T_A = 85^\circ\text{C}$	11	$\Omega$
$m$	Mass	78	g
	Standards	EN 50155: 2017 <sup>3)</sup> EN 50121-3-2: 2016	

Notes: <sup>1)</sup> The result of the coercive force of the magnetic circuit

<sup>2)</sup> For a  $di/dt = 100 \text{ A}/\mu\text{s}$

<sup>3)</sup> Additional information available on request.

## Current Transducer LF 205-S/SP5

Insulation coordination			
$U_d$	RMS voltage for AC insulation test, 50/60 Hz, 1 min	3.5	kV
$U_{Ni}$	Impulse withstand voltage 1.2/50 $\mu$ s	8.8	kV
$U_t$	Partial discharge RMS test voltage ( $q_m < 10$ pC)	> 2	kV
		Min	
$d_{cp}$	Creepage distance	9.5	mm
$d_{cl}$	Clearance	9.5	mm
CTI	Comparative tracking index (group IIIa)	175	

## Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).


Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

## Dimensions LF 205-S/SP5 (in mm)

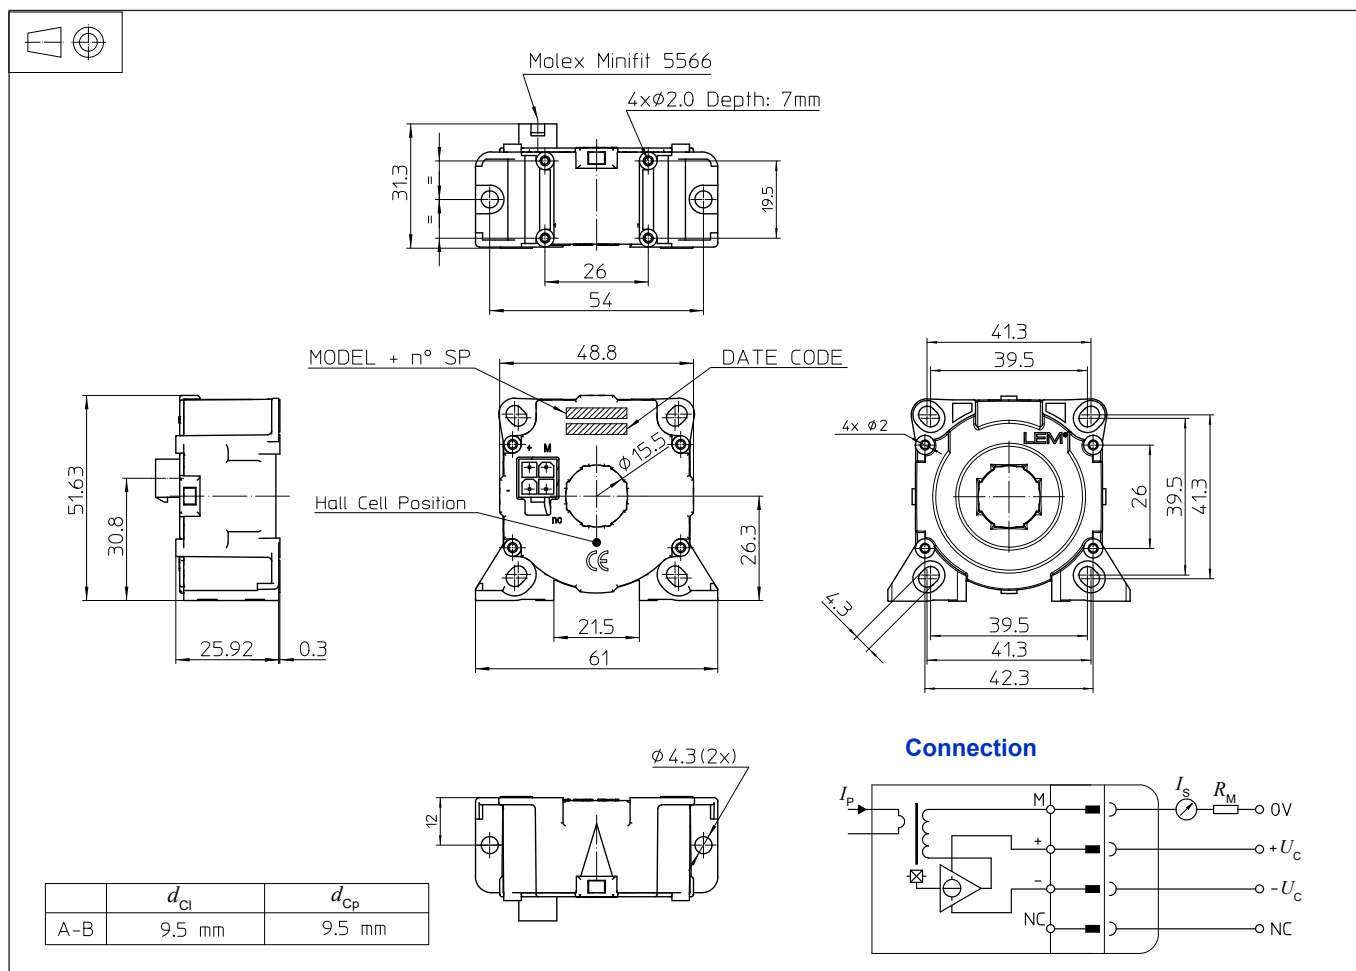

### Mechanical characteristics

- General tolerance:  $\pm 0.2$  mm
- Transducer fastening
  - Vertical position
    - 2 holes  $\varnothing 4.3$  mm
    - 2 M4 steel screws
    - Recommended fastening torque: 1.5 N·m
    - Or
      - 4 holes  $\varnothing 2.0$  mm
      - depth: 7 mm
      - 4 screws PTKA 25
      - length: 6 mm
  - Horizontal position
    - 4 holes  $\varnothing 4.3$  mm
    - 4 M4 steel screws
    - Recommended fastening torque: 1.5 N·m
    - Or
      - 4 holes  $\varnothing 2.0$  mm
      - 4 screws PTKA 25
      - min length: 11.5 mm with thickness of fixed plate
    - Recommended fastening torque: 0.7 N·m
- Primary through-hole:  $\varnothing 15.5$  mm
- Connection of secondary: Molex Minifit 5566 with gold-plated pins

### Remarks

- $I_s$  is positive when  $I_p$  flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 100 °C.
- Installation of the transducer must be done unless otherwise specified on the datasheet, according to LEM Transducer Generic Mounting Rules. Please refer to LEM document N°ANE120504 available on our Web site: <https://www.lem.com/en/file/3137/download/>.
- Dynamic performances ( $di/dt$  and delay time) are best with a single bar completely filling the primary hole.