


International  
**IOR** Rectifier

245NQ015(R)

SCHOTTKY RECTIFIER

240 Amp




#### Major Ratings and Characteristics

| Characteristics                     | 245NQ015(R) | Units      |
|-------------------------------------|-------------|------------|
| $I_{F(AV)}$ Rectangular waveform    | 240         | A          |
| $V_{RRM}$                           | 15          | V          |
| $I_{FSM}$ @ $t_p = 5 \mu s$ sine    | 20,000      | A          |
| $V_F$ @ 240 Apk, $T_J = 75^\circ C$ | 0.34        | V          |
| $T_J$ range                         | -55 to 125  | $^\circ C$ |

#### Description/Features

The 245NQ015(R) high current Schottky rectifier module has been optimized for ultra low forward voltage drop specifically for the OR-ing of parallel power supplies. The proprietary barrier technology allows for reliable operation up to 125  $^\circ C$  junction temperature. Typical applications are in parallel switching power supplies, converters, reverse battery protection, and redundant power subsystems.

- 125 $^\circ C$   $T_J$  operation ( $V_R < 5V$ )
- Unique high power, Half-Pak module
- Optimized for OR-ing applications
- Ultra low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance

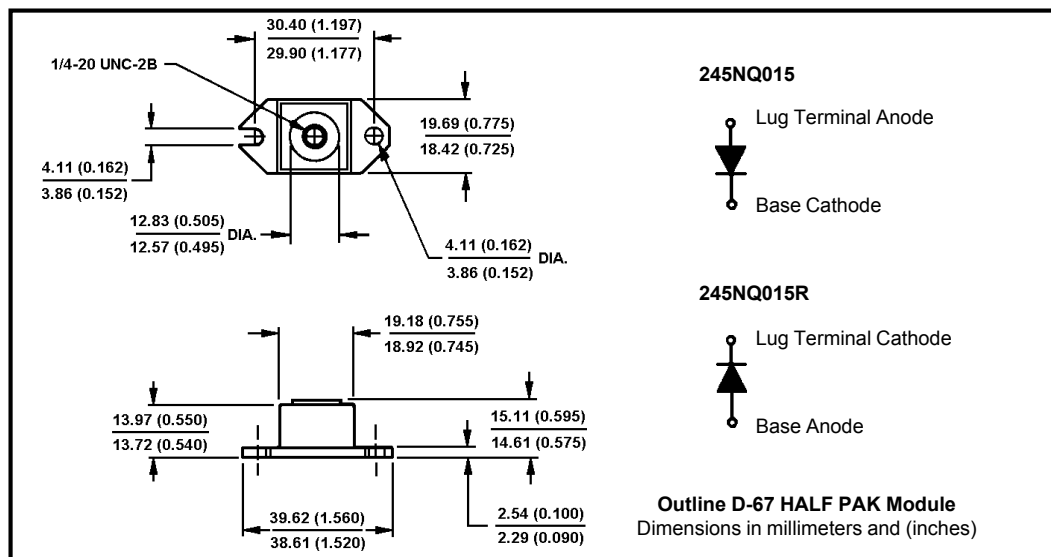

## 245NQ015

Bulletin PD-2.296 rev. B 02/01

International  
IR Rectifier

### Voltage Ratings

| Part number                                     | 245NQ015 |
|-------------------------------------------------|----------|
| $V_R$ Max. DC Reverse Voltage (V)               | 15       |
| $V_{RWM}$ Max. Working Peak Reverse Voltage (V) | 25       |

### Absolute Maximum Ratings

| Parameters                                                              | 245NQ  | Units | Conditions                                                                                                             |
|-------------------------------------------------------------------------|--------|-------|------------------------------------------------------------------------------------------------------------------------|
| $I_{F(AV)}$ Max. Average Forward Current<br>* See Fig. 5                | 240    | A     | 50% duty cycle @ $T_C = 70^\circ\text{C}$ , rectangular wave form                                                      |
| $I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7 | 20,000 | A     | 5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse                                                                    |
|                                                                         | 3000   |       | 10ms Sine or 6ms Rect. pulse                                                                                           |
| $E_{AS}$ Non-Repetitive Avalanche Energy                                | 9      | mJ    | $T_J = 25^\circ\text{C}$ , $I_{AS} = 2\text{ Amps}$ , $L = 4.5\text{ mH}$                                              |
| $I_{AR}$ Repetitive Avalanche Current                                   | 2      | A     | Current decaying linearly to zero in 1 $\mu\text{sec}$<br>Frequency limited by $T_J$ max. $V_A = 3 \times V_R$ typical |

### Electrical Specifications

| Parameters                                                | 245NQ  | Units            | Conditions                                                              |
|-----------------------------------------------------------|--------|------------------|-------------------------------------------------------------------------|
| $V_{FM}$ Max. Forward Voltage Drop (1)<br>* See Fig. 1    | 0.40   | V                | @ 240A                                                                  |
|                                                           | 0.51   | V                | @ 480A                                                                  |
|                                                           | 0.34   | V                | @ 240A                                                                  |
|                                                           | 0.44   | V                | @ 480A                                                                  |
| $I_{RM}$ Max. Reverse Leakage Current (1)<br>* See Fig. 2 | 80     | mA               | $T_J = 25^\circ\text{C}$                                                |
|                                                           | 4000   | mA               | $T_J = 100^\circ\text{C}$                                               |
|                                                           | 3560   | mA               | $T_J = 100^\circ\text{C}$                                               |
|                                                           | 2160   | mA               | $T_J = 100^\circ\text{C}$                                               |
| $C_T$ Max. Junction Capacitance                           | 15,800 | pF               | $V_R = 5V_{DC}$ , (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$ |
| $L_S$ Typical Series Inductance                           | 5.0    | nH               | From top of terminal hole to mounting plane                             |
| $dv/dt$ Max. Voltage Rate of Change<br>(Rated $V_R$ )     | 10,000 | V/ $\mu\text{s}$ |                                                                         |

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

### Thermal-Mechanical Specifications

| Parameters        |                                              |      | 245NQ           | Units             | Conditions                            |
|-------------------|----------------------------------------------|------|-----------------|-------------------|---------------------------------------|
| T <sub>J</sub>    | Max. Junction Temperature Range              |      | -55 to 125      | °C                |                                       |
| T <sub>stg</sub>  | Max. Storage Temperature Range               |      | -55 to 150      | °C                |                                       |
| R <sub>thJC</sub> | Max. Thermal Resistance Junction to Case     |      | 0.20            | °C/W              | DC operation    * See Fig. 4          |
| R <sub>thCS</sub> | Typical Thermal Resistance, Case to Heatsink |      | 0.15            | °C/W              | Mounting surface , smooth and greased |
| wt                | Approximate Weight                           |      | 25.6 (0.9)      | g (oz.)           |                                       |
| T                 | Mounting Torque                              | Min. | 40 (35)         | Kg-cm<br>(lbf-in) | Non-lubricated threads                |
|                   |                                              | Max. | 58 (50)         |                   |                                       |
|                   | Terminal Torque                              | Min. | 58 (50)         |                   |                                       |
|                   |                                              | Max. | 86 (75)         |                   |                                       |
| Case Style        |                                              |      | HALF PAK Module |                   |                                       |

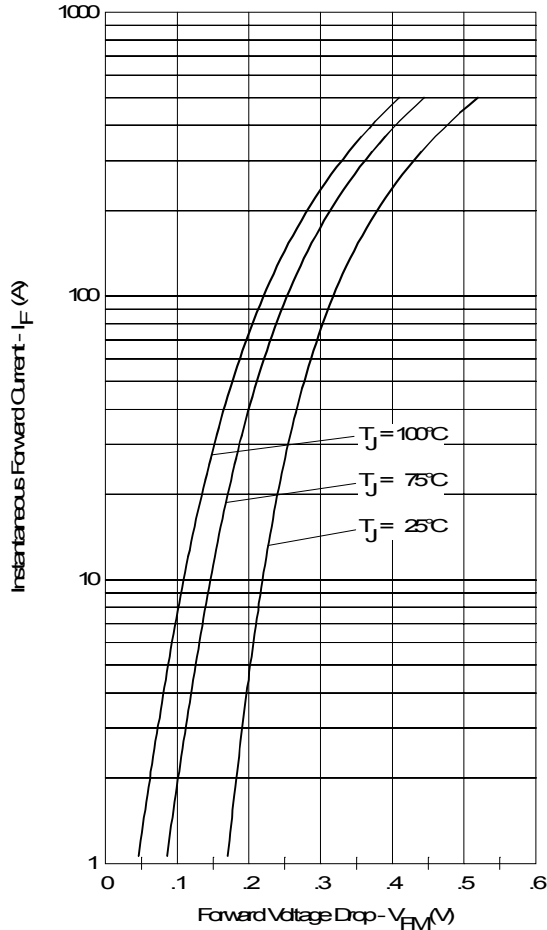


Fig. 1 - Maximum Forward Voltage Drop Characteristics

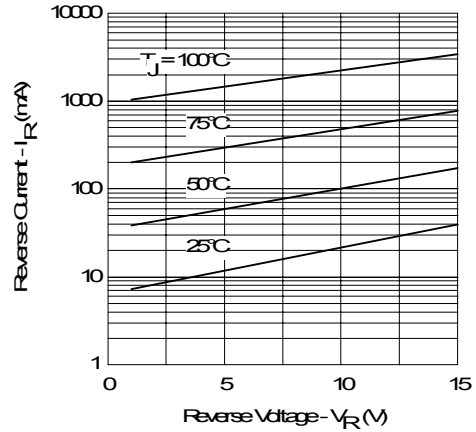


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

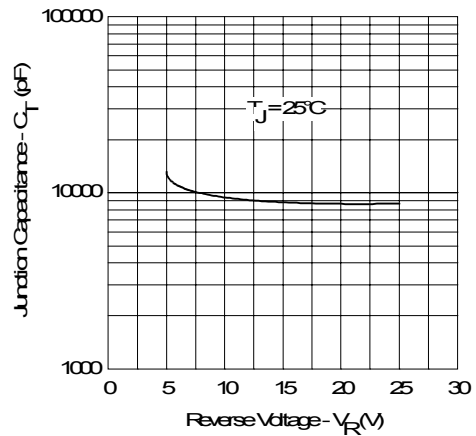


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

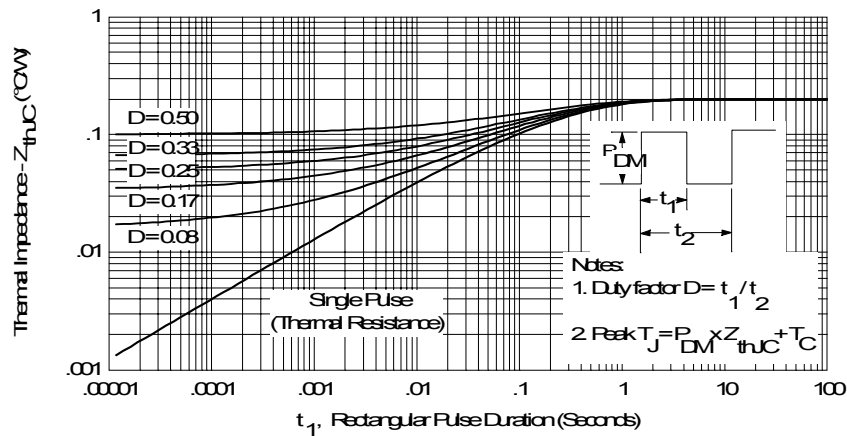


Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics

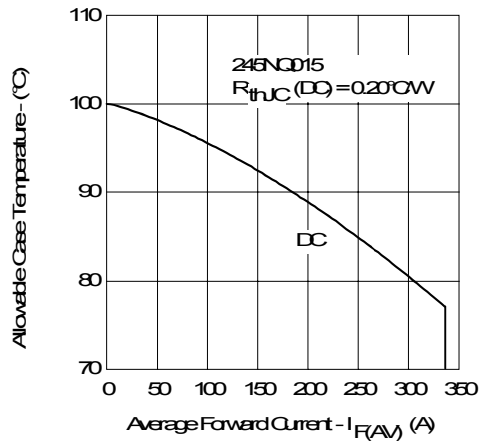


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

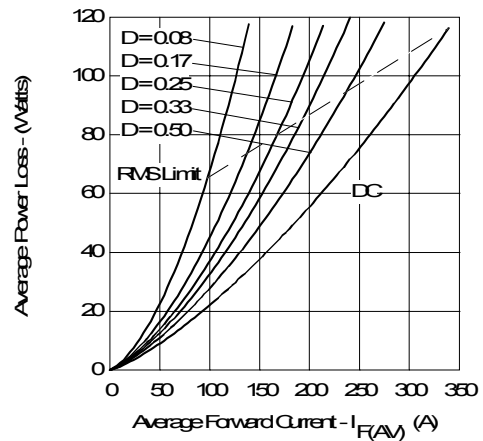


Fig. 6 - Forward Power Loss Characteristics

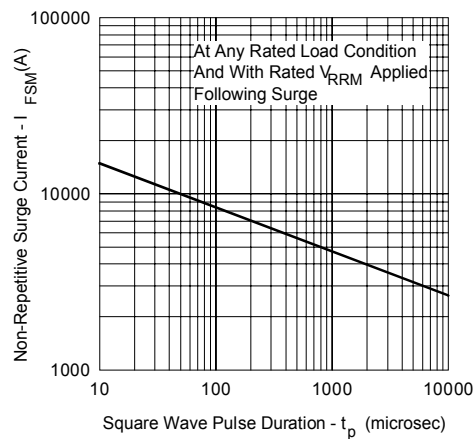


Fig. 7 - Maximum Non-Repetitive Surge Current

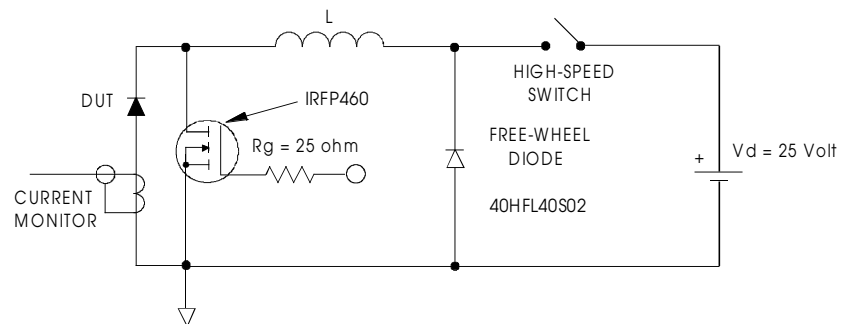


Fig. 8 - Unclamped Inductive Test Circuit