

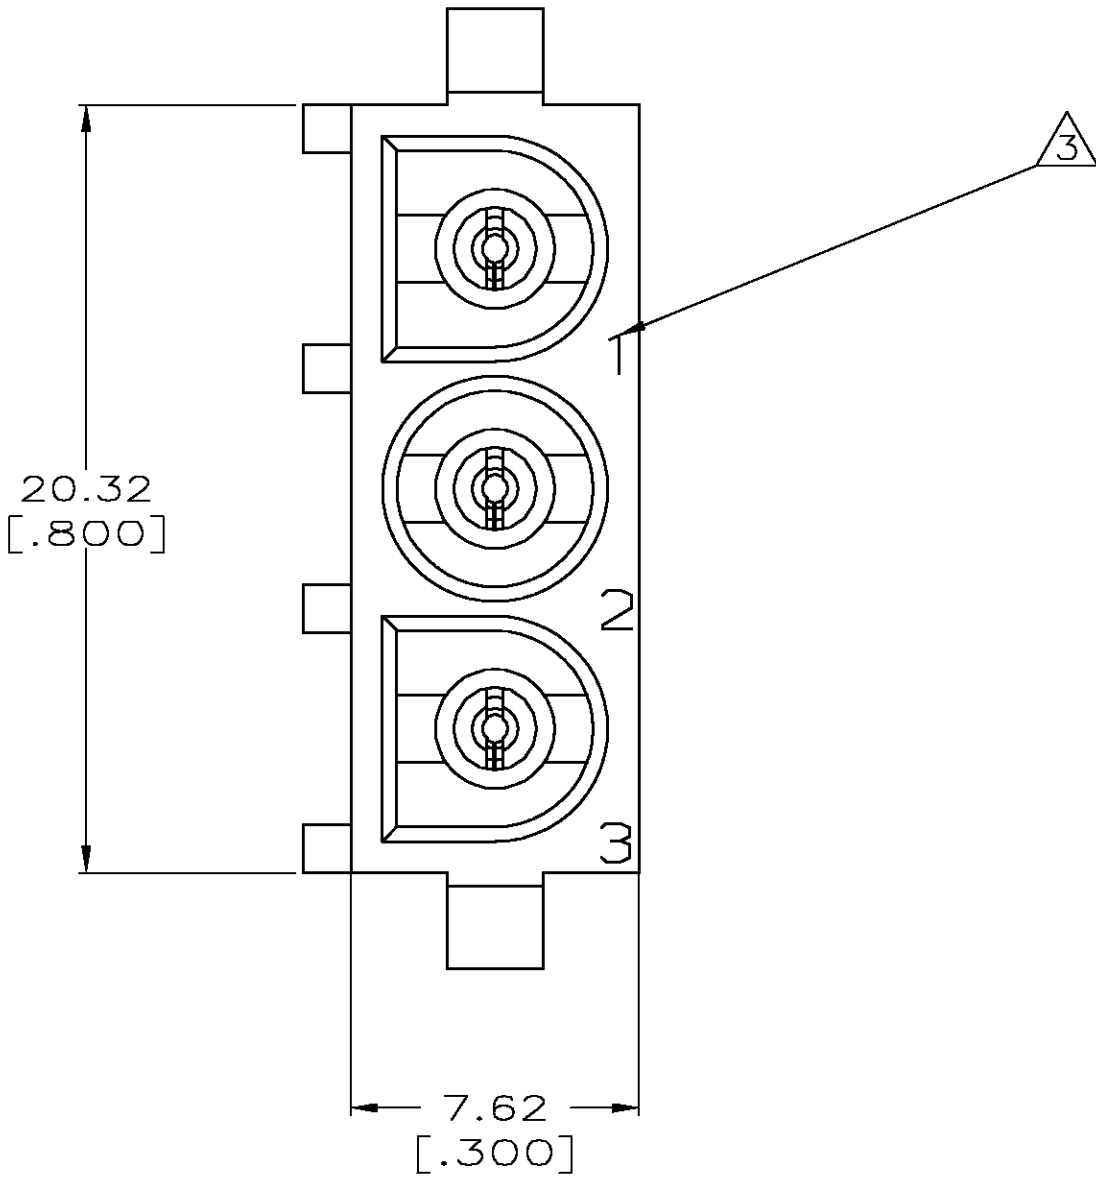
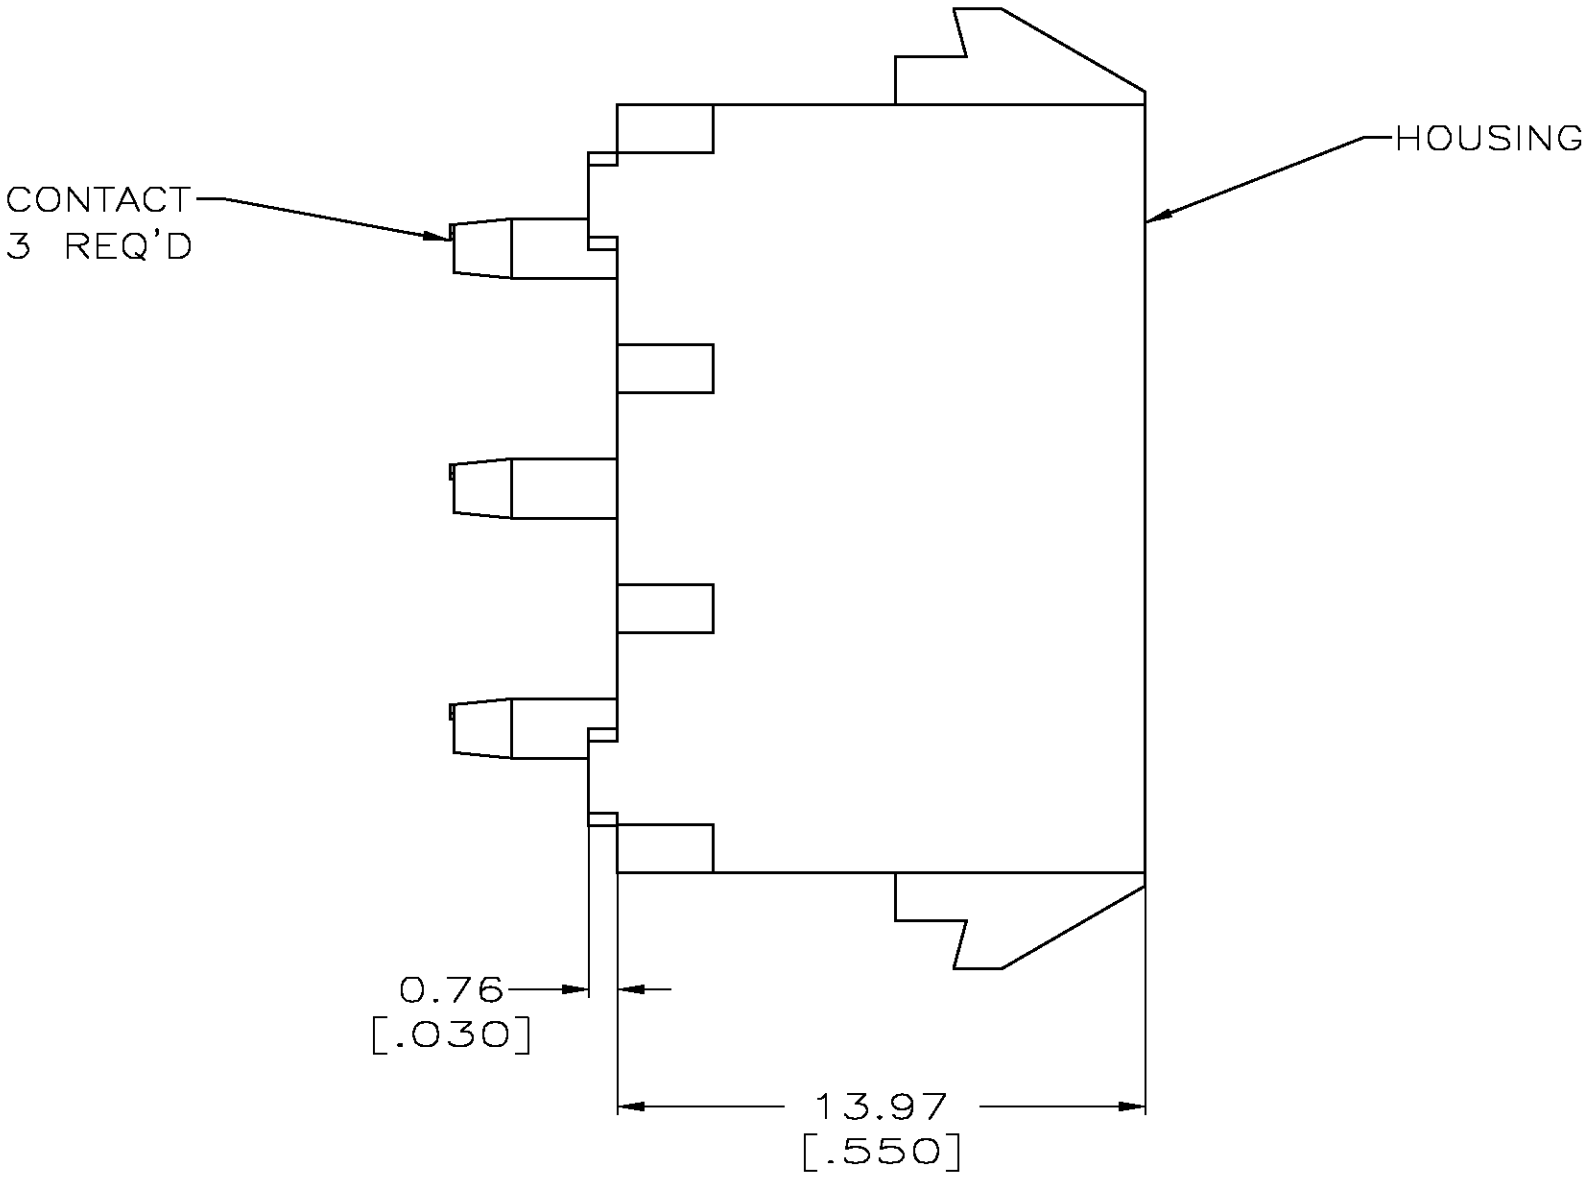
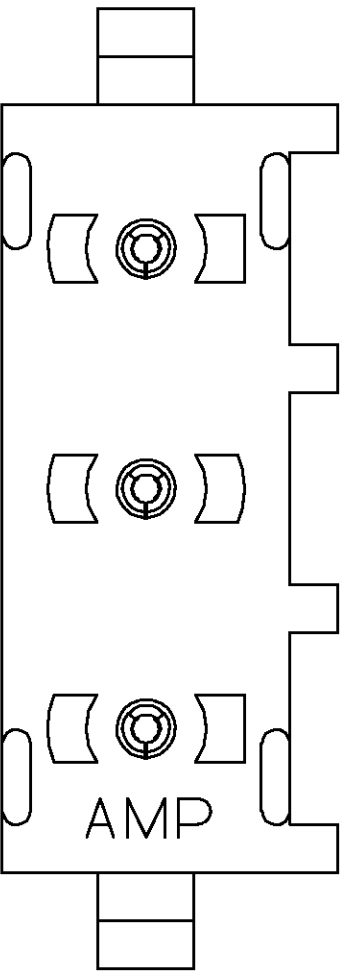



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	OWN
CM	00	R		REV PER ECN 063B-0341-03	23JUN03	SC

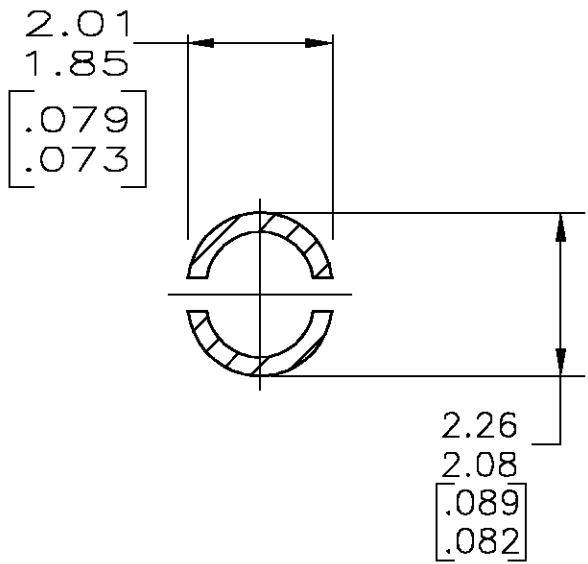


1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
- CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN-LEAD ON SOLDER TAIL END.
- CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
4. DIMENSIONS IN BRACKETS ARE IN INCHES.
- CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.

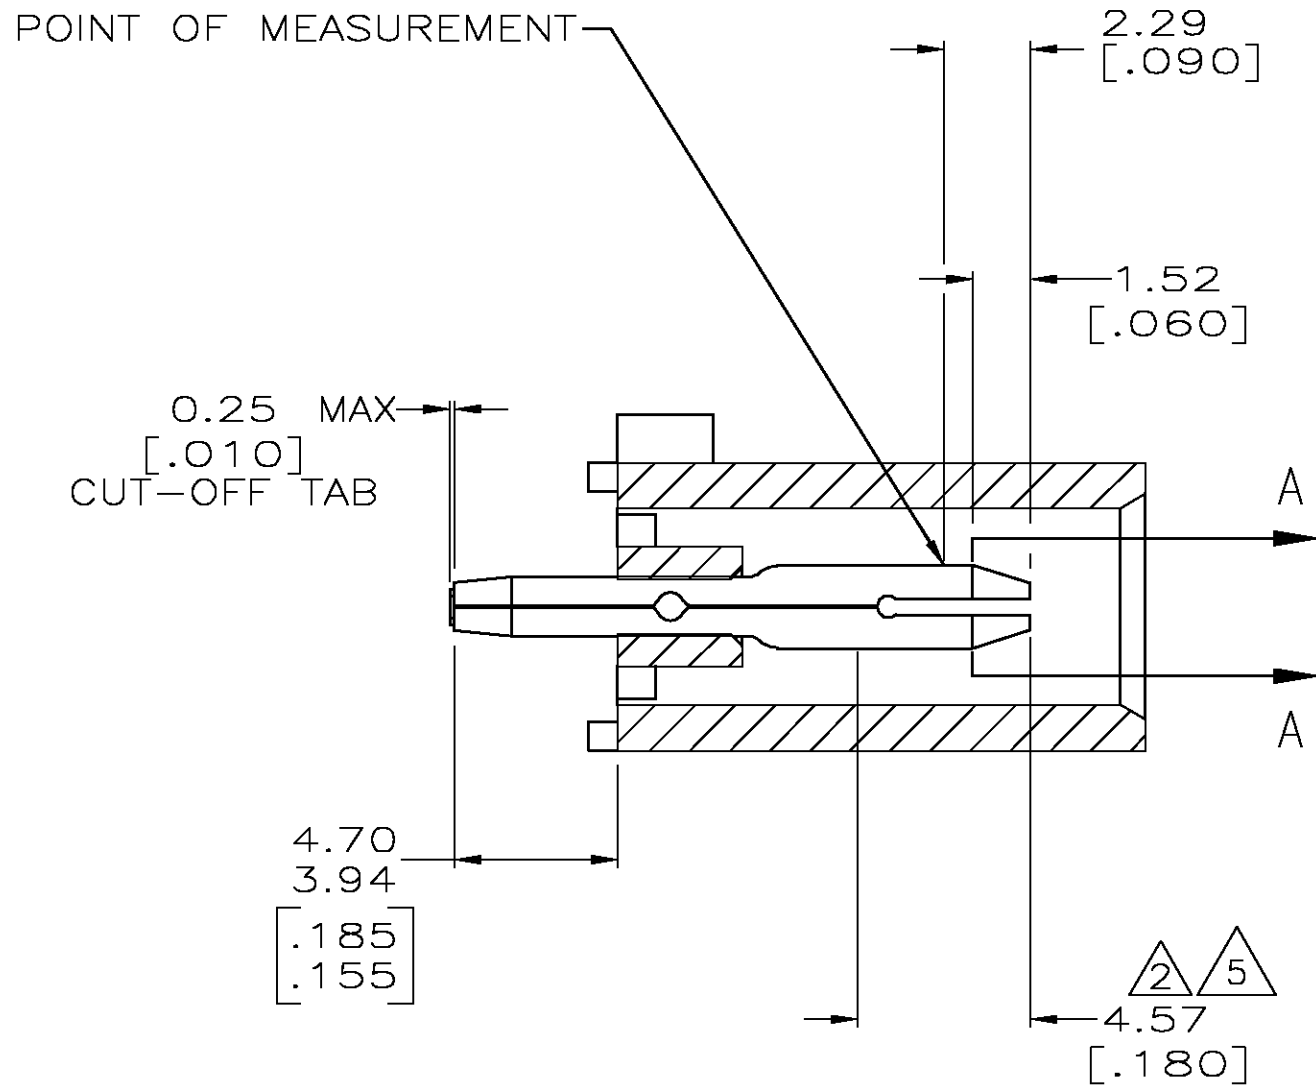

SECTION A-A
SCALE 10:1

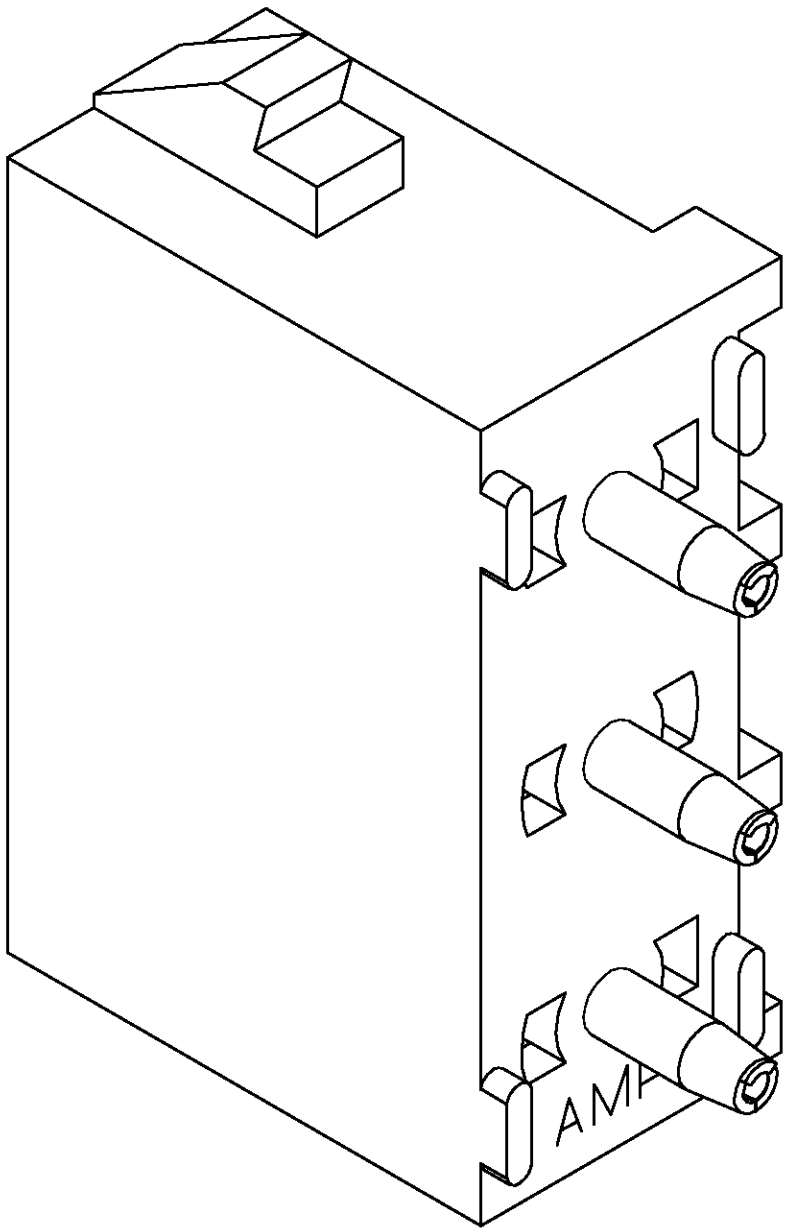

3-DIMENSIONAL MODEL
NTS

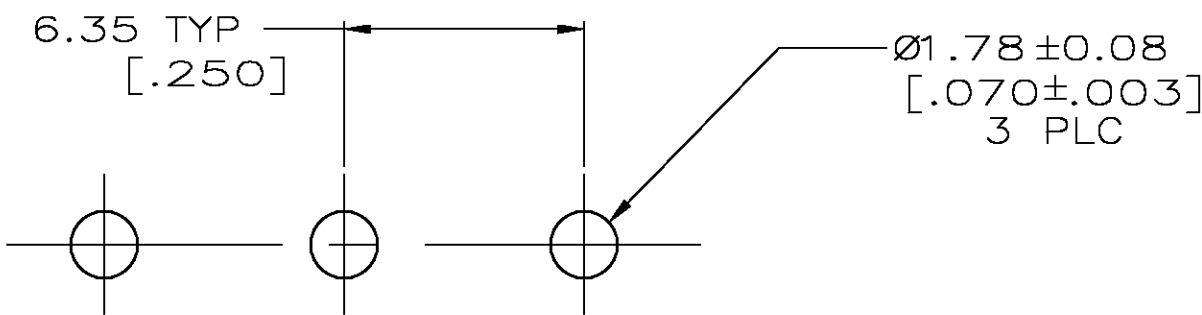

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [.062] THICK P.C. BOARD

PHOSPHOR BRONZE, GOLD 5	NYLON, UL94V-0, WHITE	350789-3
PHOSPHOR BRONZE, GOLD 2	NYLON, UL94V-0, WHITE	350789-2
PHOSPHOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	350789-1
PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN: S. CARPENTER 23JUN2003	Tyco Electronics Corporation Harriaburg, PA 17105	
DIMENSIONS: MM		CHK: S. RIDGILL 23JUN2003	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: S. RIDGILL 23JUN2003	PIN HEADER ASSEMBLY, 3 CIRCUIT	
		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
0 PLC ± 1 PLC ± 2 PLC ± 0.13 [.005] 3 PLC ± 4 PLC ± ANGLES ± 0.30° FINISH		APPLICATION SPEC		
MATERIAL: SEE TABLE		WEIGHT	A1 00779 C=350789 -	
SEE TABLE		CUSTOMER DRAWING	SCALE 5:1 SHEET 1 of 1 REV R	

METRIC