




SECTION X-X





SECTION Z-Z

INSULATION BARREL



SECTION Y-Y

WIRE BARREL

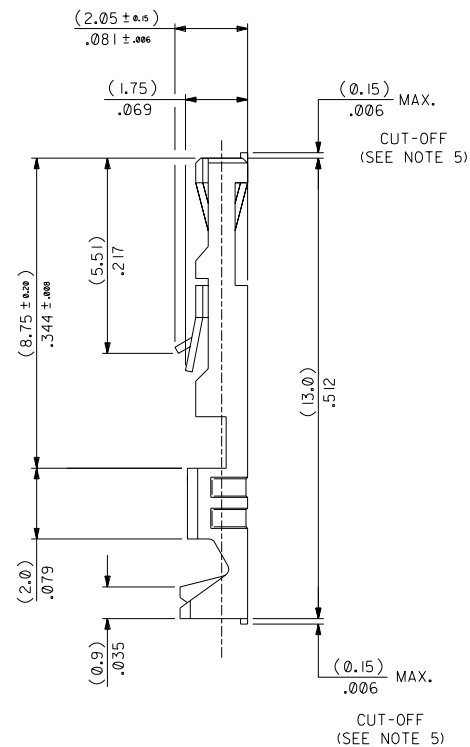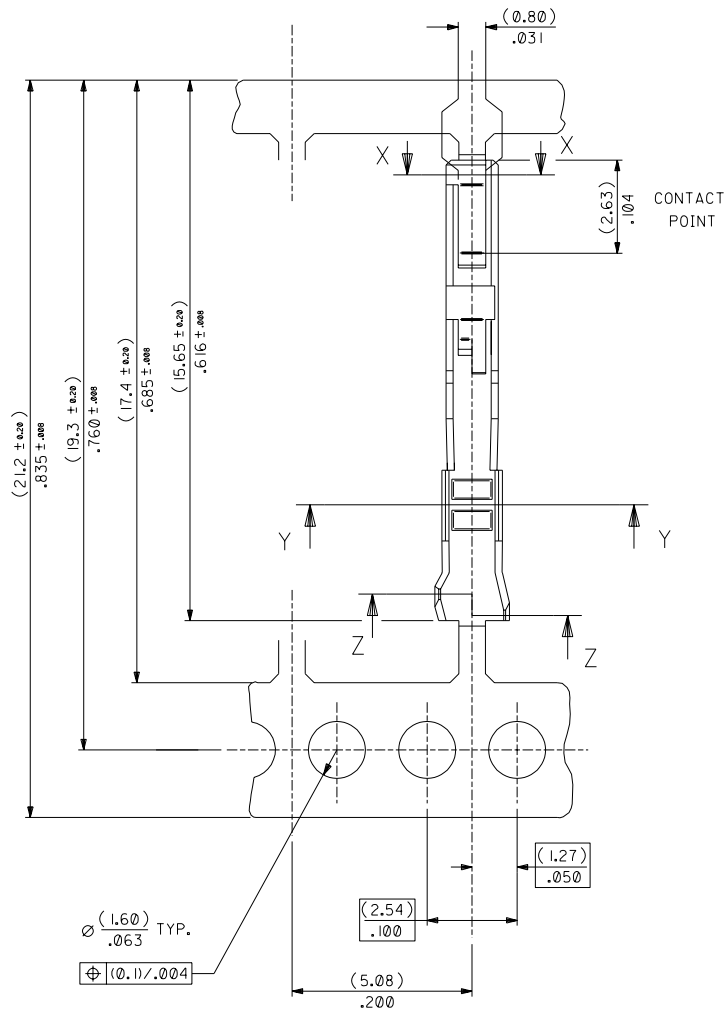

NOTES:

1. MATERIAL -
PHOSPHORE BRONZE CDA 521
THICKNESS: (0.200) .008
TENSILE STRENGTH: 655-760 N/mm²
PLATING - SEE SHEET 2
2. FOR DIMENSIONS A, B, C, D, F & G
SEE SHEET 2
3. FOR WIRE SIZE & INSULATION DIA
SEE SHEET 2
4. THIS TERMINAL TO MATE WITH
(0.635) .025 SQUARE PIN
5. MAX BURR AFTER CUT-OFF
(0.025) .001

FOR PREVIOUS
DRAWING ISSUES
SEE MRI.

CHANGED PLATING SPEC
E2000-0533
99.12.11 TM
REVISIONS
LTR

DIMENSIONS SHOWN (METRIC) INCH	
3 PLACE ± .004	± 0.10
2 PLACE ± .008	± 0.20
1 PLACE	± 0.20
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	
DESIGN DIMENSION	□ (MM)
EQUIVALENT DIMENSION (SECONDARY)	□ (IN)

DWG BY
NPC
CHK'D BY
APP'D BY
SCALE
10:1

REVISE ONLY ON CAD SYSTEM		SH.	REV.
CAD/AM FILENAME SD9019X1 DGN	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	C - GRID III FEMALE CRIMP TERMINAL		
MOLEX EUROPE		SHEET NO. DATE 1 OF 2 27/08/87	
PART NO. SEE CHART	DWG NO. SD-90119	SIZE C	

[illegible]