

Heatsink Encased Wirewound Power Resistors




FEATURES

- 5 Watt to 50 Watt at 25°C
- MIL-R 18546 D and 1C
- NF C 83-210
- CECC 40 203
- High stability < 0.05% year
- Electrical insulation
- Low temperature coefficient
- Wide range of values

Encased in a compact and light heatsink offering complete environmental protection, great mechanical strength and easy mounting. Non inductive versions can be supplied under the RHNI designation (please indicate required specifications and frequency range upon ordering).

DIMENSIONS in millimeters

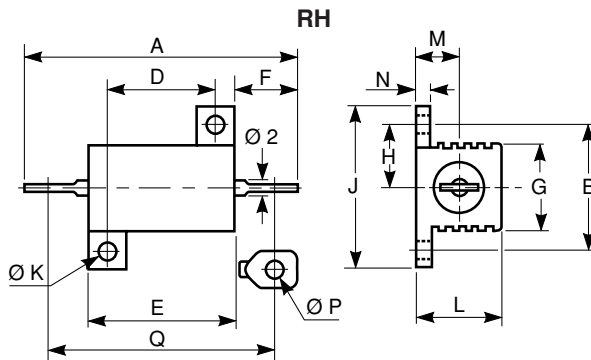

MODEL AND STYLE	RH5	RH10	RH25	RH50
A	28.5 ± 1.5	35 ± 1.5	49 ± 1.3	70.2 ± 1.4
B ± 0.2	12.5	15.9	19.8	21.4
D ± 0.2	11.3	14	18.3	39.7
E ± 0.5	16.3	19	28	50
F	6.8 ± 1.5	7.9 ± 1.5	11.1 ± 1.5	11 ± 1.2
G ± 1	8.5	11	14	15.5
H ± 0.7	6.2	7.9	9.9	10.7
J ± 0.5	16.4	20.6	27.5	29.4
Ø K ± 0.1	2.4	2.4	3.2	3.2
L max.	8.9	11	15	15
M ± 0.5	4.3	5.6	8	8
N ± 0.3	1.6	2	2.4	2.4
Ø P min.	2.1	2.1	2.1	2.1
Q	25.3 ± 1.5	30.6 ± 1.5	44.6 ± 1.3	66.5 ± 1.4
Weight in g	3	8.8	16.5	30.8

ELECTRICAL SPECIFICATIONS

VISHAY SFERNICE MODEL AND STYLE				RH5 €	RH10 €	RH25 €	RH50 €
NF C 83-210 (CECC 40 203)				RE4	RE1	RE2	RE3
MIL-R-18546 D AND 1C				RE60	RE65	RE70	RE75
Power Rating	Chassis Mounted Resistors	MIL Limits	25°C	5W	10W	20W	30W
			70°C	4W	8W	16W	24W
	413 cm ² for RH5 and RH10 536 cm ² for RH25 and RH50	VISHAY SFERNICE Limits	25°C	10W	12.5W	25W	50W
			70°C	8W	10W	20W	40W
	Unmounted Resistors	VISHAY SFERNICE Limits	25°C	4W	6W	9W	12W
			70°C	3.2W	4.8W	7.2W	9.6W
Rated Maximum Voltage (VRMS)				160V	250V	550V	1285V
Dielectric Strength (RMS)				1000V	1500V	2500V	2500V
Ohmic Range			VISHAY SFERNICE	0.01Ω 12kΩ	0.006Ω 20kΩ	0.006Ω 62kΩ	0.006Ω 130 kΩ
Qualified Ohmic Range			NF C 83-210	0.1Ω 2.7kΩ	0.1Ω 4.99kΩ	0.1Ω 11.8kΩ	0.1Ω 33.2kΩ
Minimum Ohmic Values in Relation to Tolerance	E 96	± 0.1%	1Ω		1Ω		
	E 96	± 0.5%	0.1Ω		0.1Ω		
	E 96	± 1%	0.1Ω		0.05Ω		
	E 48	± 2%	0.01Ω		0.01Ω		
	E 24	± 5%	0.01Ω		0.01Ω		
	E 12	± 10%	0.01Ω	0.008Ω	0.006Ω		

€ Undergoes European Quality Insurance System (CECC)



PERFORMANCE			
MIL-R-18546 D		NF C 83-210	
TESTS	CONDITIONS	REQUIREMENTS	TYPICAL DRIFTS
Operating Temperature Range	- 55°C + 200°C	—	—
Momentary Overload	5Pr/5s	$\pm (0.25\% + 0.05\Omega)$	$\pm (0.1\% + 0.05\Omega)$
Climatic Sequence	- 55°C + 200°C 5 cycles	$\pm (0.25\% + 0.05\Omega)$	$\pm (0.1\% + 0.05\Omega)$
Load Life Test at High Temperature	2h at + 275°C	$\pm (1\% + 0.05\Omega)$ Ins. resistance $\geq 1G\Omega$	$\pm (0.1\% + 0.05\Omega)$
Humidity (Steady State)	56 days	$\pm (1\% + 0.05)$ Ins. resistance $\geq 100M\Omega$	$\pm (0.5\% + 0.05\Omega)$
Resistance to Moisture	Climatic sequences test, with load and polarisation	$\pm (1\% + 0.05\Omega)$	$\pm (0.5\% + 0.05\Omega)$
Temperature Coefficient	5 to 10 Ω > 10 Ω	$\pm 50ppm/^{\circ}C$ $\pm 25ppm/^{\circ}C$	$\pm 15ppm/^{\circ}C$
Load Life at Maximum Temperature	1000h 25°C	$\pm (1\% + 0.05\Omega)$	$\pm (0.1\% + 0.05\Omega)$
	200°C Pn MIL VISHAY 30% of Pn SFERNICE	Ins. resistance $\geq 1G\Omega$	$\pm (0.5\% + 0.05\Omega)$

MOMENTARY OVERLOAD

1. Momentary overload (> 2s):

See example in table below. In all cases, it should be understood that:


- the 12Pn overload applies only to ohmic values $\geq 0.1\Omega$.
- the overload voltage shall not be higher than that used for the dielectric strength test (see Standard Electrical Specifications).

2. Short time overload (< 2s):


For times shorter than 2 seconds, higher overloads can be sustained in some cases. Consult VISHAY SFERNICE.

POWER LOADING	DURATION
2.5 Pn	10 s
5 Pn	5 s
12 Pn	2 s

POWER RATING CHART

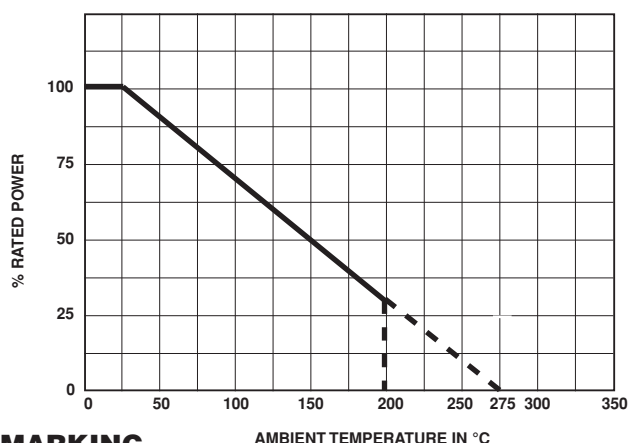

TEMPERATURE RISE

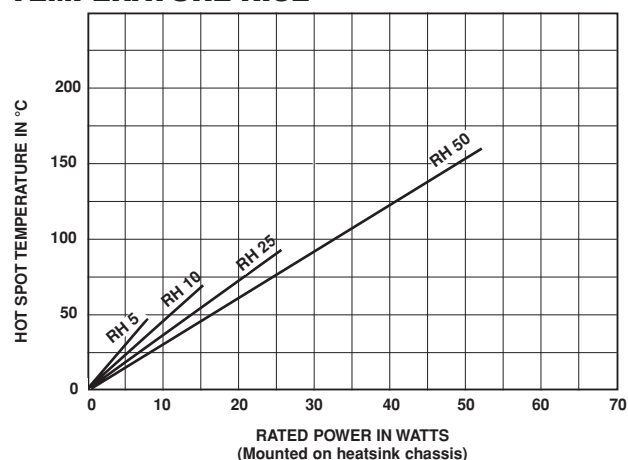

MARKING

VISHAY SFERNICE trademark, model, style, CECC style (if applicable) nominal resistance (in Ω), tolerance (in %), manufacturing date.

ORDERING INFORMATION					
RH	25	NI		150k Ω	$\pm 5\%$
MODEL	STYLE	NON INDUCTIVE WINDING	SPECIAL DESIGN	OHMIC VALUE	TOLERANCE
		Optional	Method N° Optional	Custom items are subject to extra-charge and min. order. Please see price list.	