


.100" × .100" Wiremount Socket Preassembled

.050" Pitch Cable (Optional Plastic or Metal Strain Relief)

3000 Series

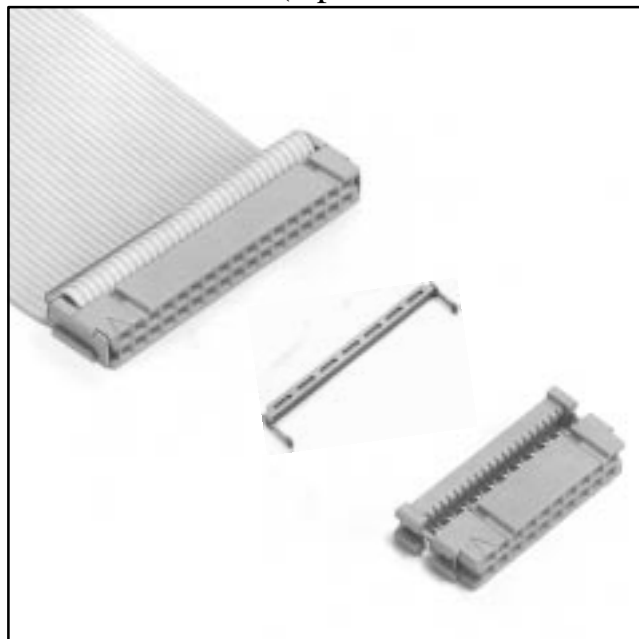

- Industry standard IDC socket
- Optional plastic or low profile metal strain relief
- Positive locking metal “J” clips provide high cover retention
- Mates with 3M headers, plugs and pin strips for quick connect/disconnect capability
- Open or closed end covers available
- Accepts flat cable or discrete wire
- Military polarization, with or without centerbump
- Faster termination, lower applied cost and improved productivity

Date Modified: September 17, 1999

TS-0719-03
Sheet 1 of 2

Physical

Insulation

Material: Glass Filled Polyester (PBT)
Flammability: UL 94V-0
Color: Gray

Contact

Material: Copper Alloy
Plating
Underplate & U-Slot: 100 μ " [2.54 μ m] Nickel — QQ-N-290, Class 2
Wiping Area: 30 μ " [0.76 μ m] Gold — MIL-G-45204, Type II, Grade C

Wire Accommodation: 26 & 28 AWG Solid or Stranded

Marking: 3M Logo, Part Identification Number and Orientation Triangle

Electrical

Current Rating: 1 A
Insulation Resistance: $> 1 \times 10^9 \Omega$ at 500 Vdc
Withstanding Voltage: 1000 Vrms at Sea Level

Environmental

Temperature Rating: -55°C to $+105^{\circ}\text{C}$

UL File No.: E68080




3M Interconnect Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373

.100" × .100" Wiremount Socket Preassembled .050" Pitch Cable (Optional Plastic or Metal Strain Relief)


3000 Series

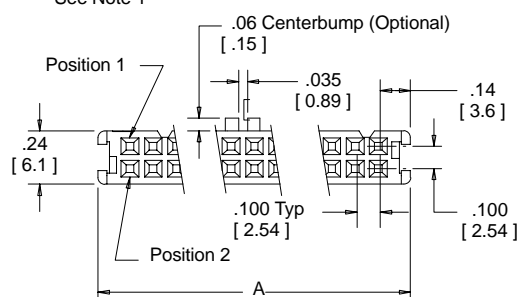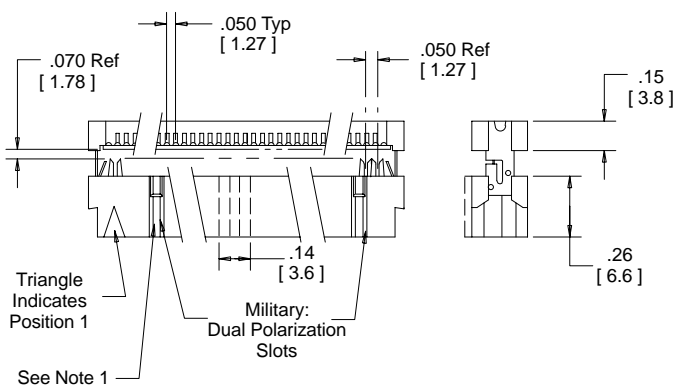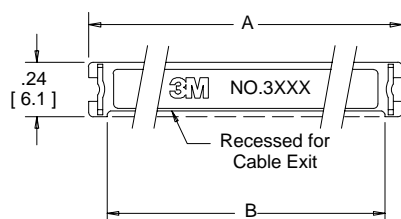


Notes:

1. This polarizing groove is non-existent on 3385 and 3473 Series.
2. The low profile strain relief can be used with the 4600 Series Plug and .1 x .1 Headers with ejector latches. The latches will only function as an ejector.
3. See TS-0721 for mating post pattern.


Contact Quantity	Socket Series	Dimensions	
		A	B
10	3473	0.68 [17.3]	0.54 [13.7]
14	3385	0.88 [22.4]	0.74 [18.8]
16	3452	0.98 [24.9]	0.84 [21.3]
20	3421	1.18 [30.0]	1.04 [26.4]
24	3626	1.38 [35.1]	1.24 [31.5]
26	3399	1.48 [37.6]	1.34 [34.0]
30	3419	1.68 [42.7]	1.54 [39.1]
34	3414	1.88 [47.7]	1.74 [44.2]
36	9436	1.98 [50.3]	1.84 [46.7]
40	3417	2.18 [55.4]	2.04 [51.8]
44	9444	2.38 [60.5]	2.24 [56.9]
50	3425	2.68 [68.1]	2.54 [64.5]
60	3334	3.18 [80.8]	3.04 [77.2]



Assembled Height with Metal Strain Relief



Assembled Height without Strain Relief



Assembled Height with Plastic Strain Relief

Inch
[mm]

Tolerance Unless Noted

	.0	.00	.000
Inch	± .1	± .01	± .005

[] Dimensions for Reference only

Ordering Information

Sockets XXXX-XXXX

Socket Series:
See Table for
3M Part
Number

Polarization:
0 = Military (Dual Slot)
6 = Centerbump and
Military

Strain Relief:
00 = No Strain Relief
XX = "Contact Quantity"
for Plastic
Strain Relief
(i.e. 50 for a 50
Position Strain Relief)

Preassembled Cover Options:

- G = Open Cover,
recess on odd row side
- H = Open Cover,
recess on even row side
- J = Closed Cover, for end cable termination,
recess on odd row side
- K = Closed Cover, for end cable termination,
Recess on even row side

Strain Relief (Order Separately) 3448-X0XX

Type: _____
2 = Low Profile
(Metal)
3 = Plastic

XX = "Contact Quantity"
(i.e. 50 for
a 50 Position
Strain Relief)

See TS-0720

Keying Plug (Order Separately) 3435-0

Pull Tabs (Order Separately) 3490-X

TS-0719-03
Sheet 2 of 2

3M Interconnect Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373