

Power Resistors

Series HXP 200, SOT 227


200 Watt Power Resistor in the "ISOTOP" Power Device

Due to a non inductive design these elements are ideally suited for high frequency and pulse load applications. By direct mounting on a heatsink significant cost advantages can be realized. The type HXP can be supplied in a 2-terminal or 4-terminal version. Even double resistors are available. Main applications are: Variable speed Drives, Power Supplies, Control Devices, Telecom, Robotics, Motor Controls and other switching designs.

Specials and custom designed components on request.


Specifications

- Resistance Range: 0.1Ω to 1MΩ
- Tolerance: ±1%, 2%, 5%, 10%
- Temperature coefficient: ±50, ±100ppm, ±250ppm (at +105°C ref. to +25°C)
- Max. Work.Voltage: 500V (up to 1,000V on special request)
- Power Rating at 85°C: 200W (see derating)
- Partial Discharge: up to 2,000Vrms/80 pC
- Voltage Proof: Dielectric Strength up to 4,000V DC against ground
- Protectionclass: acc. to IEC 950/CSA22.2 950/M-89 and EN 60950.88: 2
- Heat Resistance to Cooling Plate: $R_{th} < 0.35 \text{ K/W}$
- Capacitance/Mass: 45pF
- Working Temp. Range: -55°C to +155°C
- Max.Torque for Base Plate (static): 1.5 Nm
- Max.Torque for Contacts (static): 1.3 Nm. M4 screws


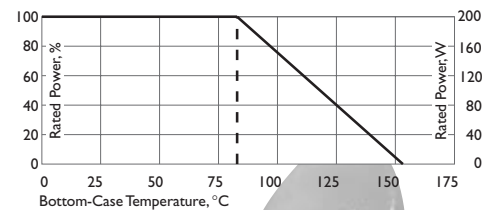


Derating (thermal resistance):
2.86W/°K (0.35°K/W).

Configurations

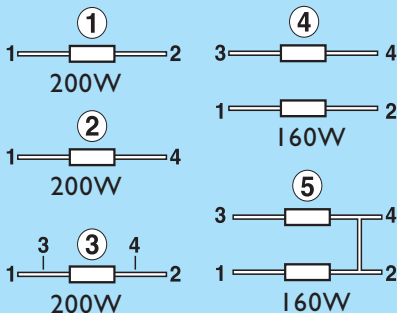

Typical TCR – Curve

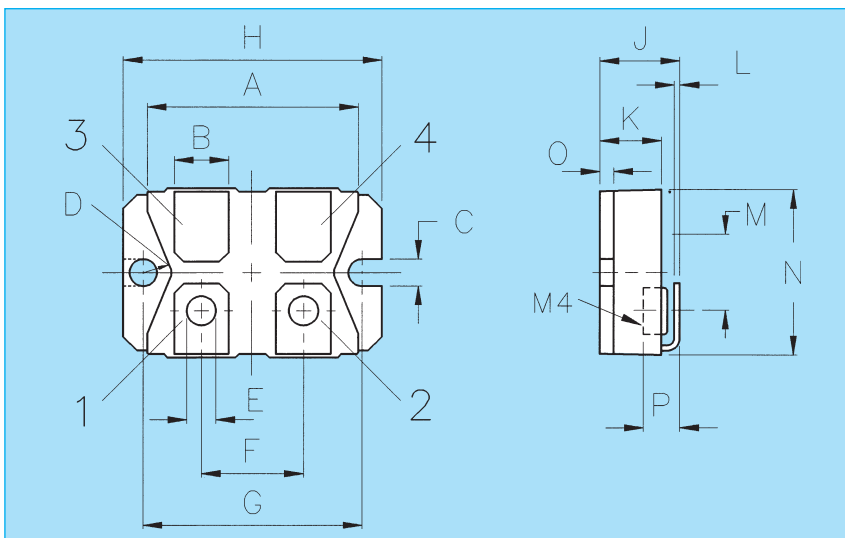

Dim.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	31.0	31.7	1.220	1.249
B	7.8	8.2	0.307	0.323
C	4.1	4.3	0.162	0.169
D	4.0	—	0.158	—
E	4.1	4.3	0.162	0.169
F	14.9	15.1	0.587	0.595
G	30.1	30.3	1.186	1.193
H	38.0	38.2	1.497	1.505
J	11.8	12.2	0.465	0.481
K	8.9	9.1	0.351	0.359
L	0.75	0.85	0.030	0.033
M	12.6	12.8	0.496	0.504
N	24.4	25.4	0.960	1.001
O	1.95	2.05	0.077	0.081
P	5.3	—	0.209	—

In the above spec sheet, you will find our standard product, please contact your local manufacturing representative or call us direct to find out details of other options available regarding this style:

<http://www.ebgusa.com> & e-mail: sales@ebg.at & sales@ebgusa.com