

DUAL OPERATIONAL AMPLIFIER



JRC4580

DESCRIPTION

JRC4580 is the dual operational amplifier, specially designed for improving the tone control, which is most suitable for the audio application.


Featuring noiseless, higher gain bandwidth, high output current and low distortion ratio, and it is most suitable not only for acoustic electronic part of audio pre-amp and active filter, but also for the industrial measurement tools. It is also suitable for the head phone amp at higher output current. And further more, it can be applied for the handy type set operational amplifier of general purpose in application of low voltage single supply type which is properly biased of the input low voltage source.


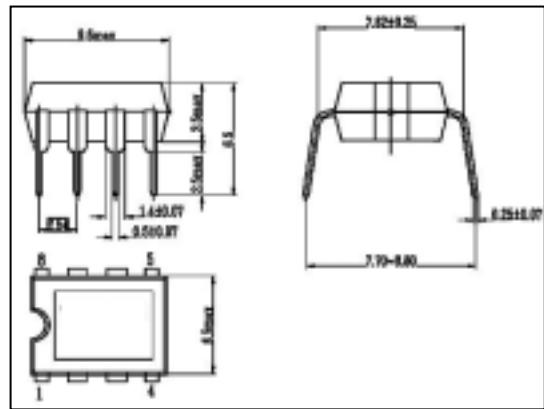
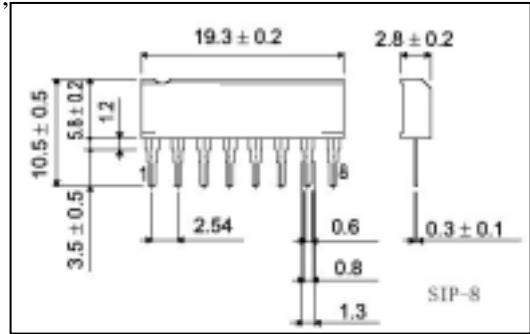
Outline Drawing



FEATURE

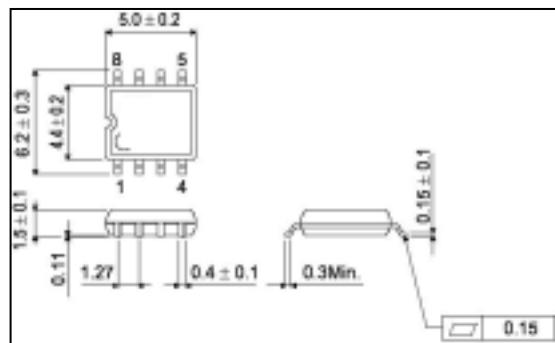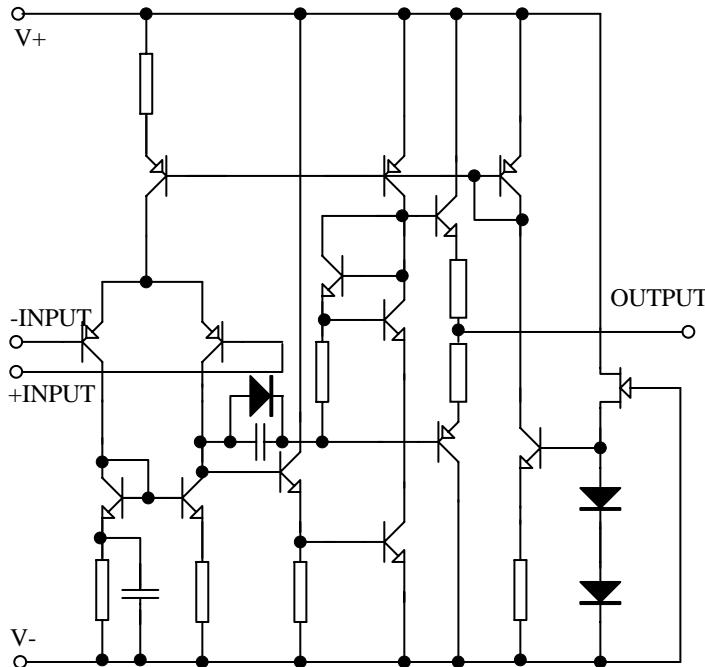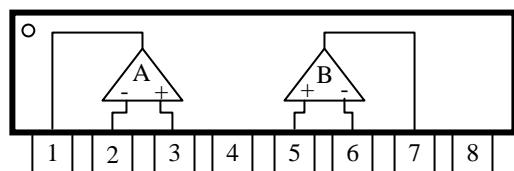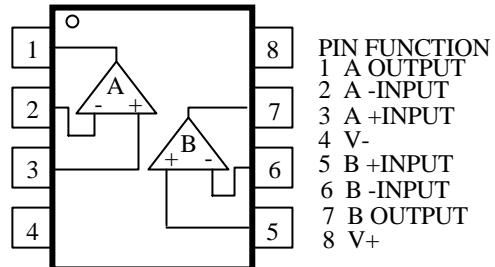- Operating Voltage ($\pm 2V \sim \pm 16V$)
- Low Input Noise Voltage ($0.8\mu V_{rms}$ Typ.)
- Wide Gain Bandwidth Product (15mhz Typ.)
- Low Distortion (0.0005% Typ.)
- Slew Rate ($5V/\mu A$ Typ.)
- Package Outline DIP8, SIP8, SOP8
- Bipolar Technology









EQUIVALENT CIRCUIT**PIN CONFIGURATION****ABSOLUTE MAXIMUM RATINGS (Ta=25°C)**



Characteristic	Symbol	Value	Unit
Supply Voltage	V+/V-	±16	V
Input Voltage	V _{IC}	±15	V
Differential Input Voltage	V _{ID}	±30	V
Output Current	I _C	±50	mA
Power Dissipation	P _D	800	mW
Operating Temperature Range	T _{tamb}	-40~85	°C
Storage Temperature Range	T _{stg}	-40~125	°C

ELECTRICAL CHARACTERISTICS(Unless otherwise specified: $T_a=25^\circ\text{C}$, $V+/V-=\pm 15\text{V}$)


Parameter	Symbol	Test condition	Min	Typ	Max	Unit
Input Offset Voltage	V_{IO}	$R_s \leq 10\text{k}\Omega$		0.5	3	mV
Input Offset Current	I_{IO}			5	200	nA
Input Bias Current	I_B			100	500	nA
Large Signal Voltage Gain	A_v	$R_L \geq 2\text{k}\Omega, V_o=\pm 10\text{V}$	90	110		dB
Output Voltage Swing	V_{OM}	$R_L \geq 2\text{k}\Omega$	± 12	± 13.5		V
Input Common Mode Voltage Range	V_{ICM}		± 12	± 13.5		V
Common Mode Rejection Ratio	CMR	$R_s \leq 10\text{k}\Omega$	80	110		dB
Supply Voltage Rejection Ratio	SVR	$R_s \leq 10\text{k}\Omega$	80	110		dB
Operating Current	I_{CC}			6	9	mA
Slew Rate	SR	$R_L \geq 2\text{k}\Omega$		5		V/ μ A
Gain Bandwidth Product	GB	$f=10\text{kHz}$		15		MHz
Total Harmonic Distortion	THD	$A_v=20\text{dB}, V_o=5\text{V}, f=1\text{kHz}, R_L=2\text{k}\Omega$		0.0005		%
Input Noise Voltage	V_{NI}	RIAA $R_s=2.2\text{k}\Omega, 30\text{kHzLPF}$		0.8		μVrms

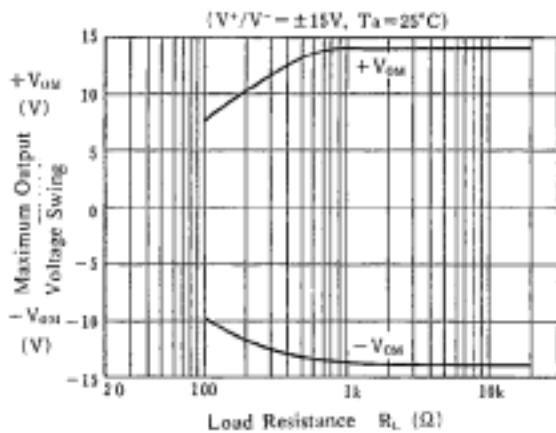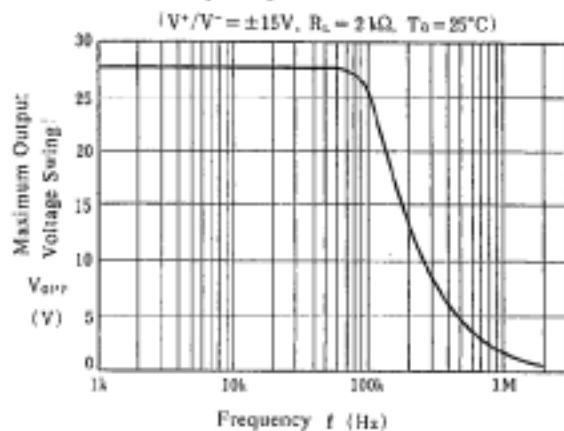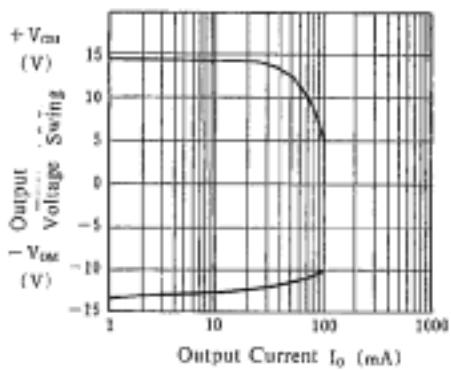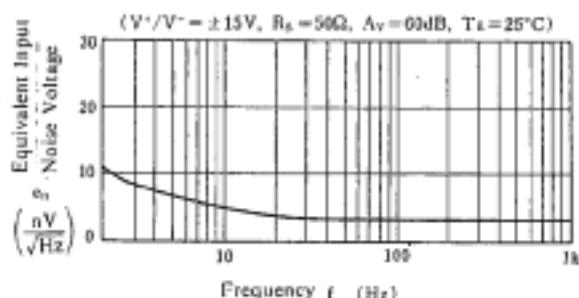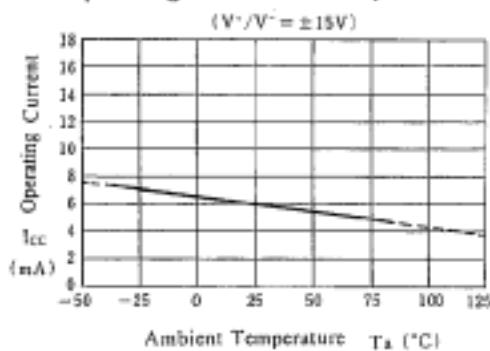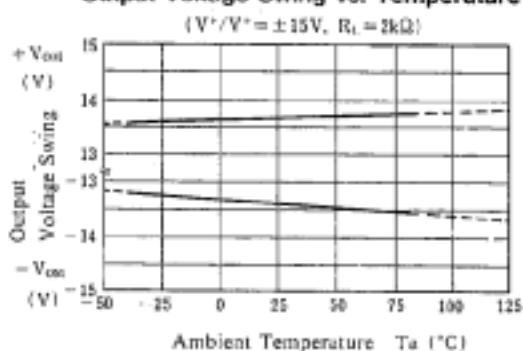CHARACTERISTICS CURVES**Maximum Output Voltage Swing
vs. Load Resistance****Maximum Output Voltage Swing
vs. Frequency****Output Voltage Swing
vs. Output Current****Equivalent Input Noise Voltage
vs. Frequency****Operating Current vs. Temperature****Output Voltage Swing vs. Temperature**

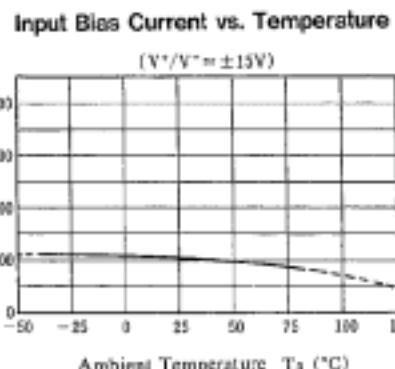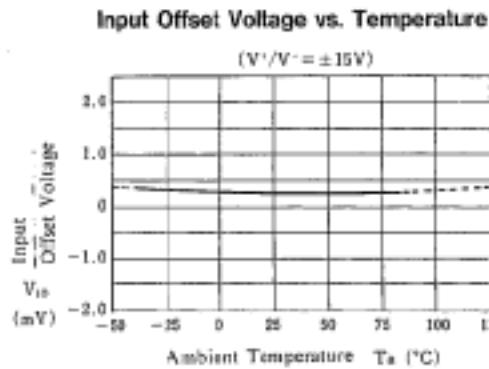
■ TYPICAL CHARACTERISTICS



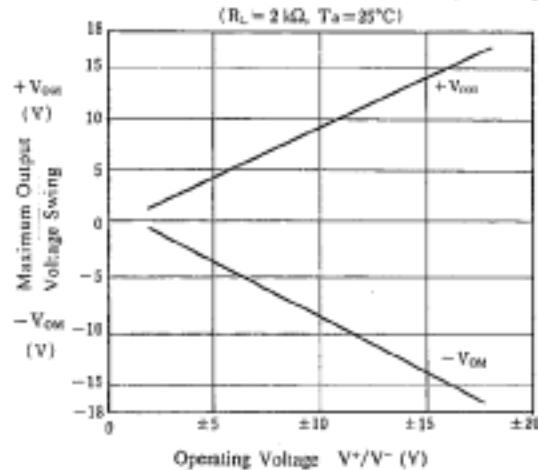
Maximum Output Voltage Swing vs. Operating Voltage



Operating Current vs. Operating Voltage

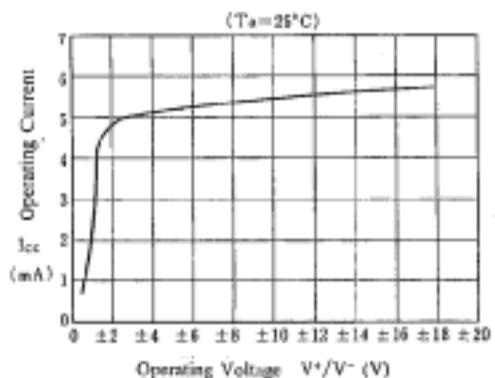

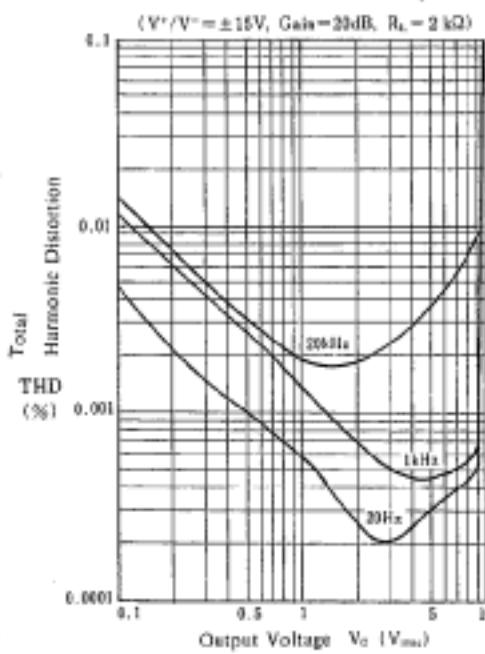Total Harmonic Distortion vs. Output Voltage



Voltage Gain, Phase vs. Frequency

