


CUSTOMER INFORMATION SHEET

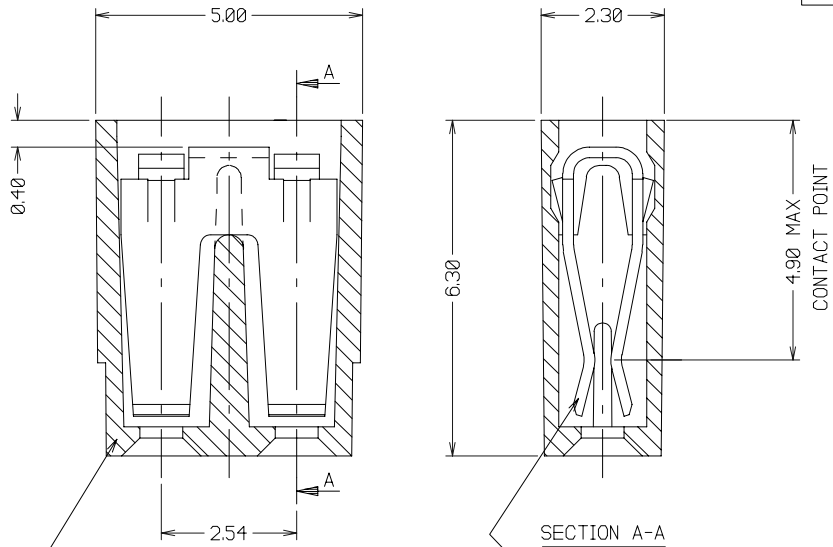

DATA:

INSERTION FORCE: MAX. 4N PER PIN
8N PER PAIR.

SEPARATING FORCE: MIN. 0.5N PER PIN
1.0N PER PAIR.

USING A 0.635 SQUARE STEEL PIN.

CLIP RETENTION IN MOULDING 6N MIN.

GLASS FILLED POLYESTER UL94V-0
FOR USE WITH 0.635 SQUARE OR ROUND POST.
COLOURS AVAILABLE:

LIGHT GREY	M7565-XX
RED	M7566-XX
BLACK	M7567-XX
BLUE	M7571-XX

PHOSPHOR BRONZE TO BS2870 PB102
FINISH: -06: TIN/LEAD 90/10 ON NICKEL
-05: GOLD ON CONTACT FACE OVER NICKEL

2	19.07.95	2987
1	11.09.89	----
ISS.	DATE	C/N
APPROVED:		
CHECKED:		
DRAWN: w. BOURNE		
CUSTOMER REF.		
ASSEMBLY DRG:		



HARWIN INC U.S.A. TEL: (812) 285 0055 FAX: (812) 285 0056 HARWIN PLC UK. TEL: (01705) 370451 FAX: (01705) 324010 HARWIN PTE SINGAPORE TEL: 7794909 FAX: 7793868			TOLERANCES X. = ±1mm X.X = ±0.25mm X.XX = ±0.10mm X.XXX = ±0.01mm ANGLES = ±1° UNLESS STATED	MATERIAL: SEE TABLE FINISH: S/AREA: mm²	TITLE: JUMPER SOCKET DRAWING NUMBER: M7565-XX M7566-XX M7567-XX M7571-XX	SHT 2 OF 2
---	--	--	--	---	--	---------------------