


Powerline N-Channel Trench Gate IGBT Module

PSTG 25HDT12

$V_{CES} = 1200 \text{ V}$
 $V_{CE(sat)} = 1.9 \text{ V}$
 $I_{C25} = 35 \text{ A}$
 $I_{C75} = 25 \text{ A}$
 $I_{CM} = 75 \text{ A}$
 $t_{sc} = 10 \text{ } \mu\text{s}$

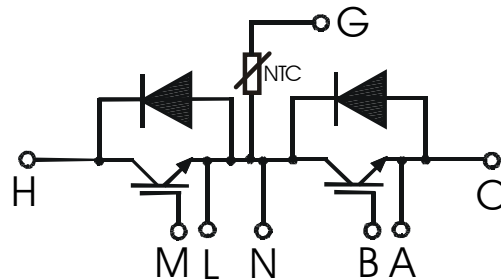

Symbol	Test Conditions	Maximum Ratings	
V_{CES}	$T_{VJ} = 25^{\circ}\text{C}$ to 150°C	1200	V
V_{GES}	continuous	± 20	V
I_{C25}	$T_C = 25^{\circ}\text{C}$;	35	A
I_{C75}	$T_C = 75^{\circ}\text{C}$;	25	A
I_{CM}	$T_C = 75^{\circ}\text{C}$;	75	A
P_{tot}	$T_C = 75^{\circ}\text{C}$	45	W
t_{sc}	$V_{CE} = 80 V_{CES}$, $R_G = 10 \text{ } \Omega$, $V_{GE} = \pm 15 \text{ V}$ $T_{VJ} = 125^{\circ}\text{C}$, non-repetitive	10	μs
T_{VJ}		-40...+150	$^{\circ}\text{C}$
T_{stg}		-40...+125	$^{\circ}\text{C}$
R_{thJC}	IGBT-per Devices	1.65	K/W
R_{thJC}	Diode-per Devices	4.0	K/W
V_{ISOL}	$I_{ISOL} \leq 1 \text{ mA}$, 50/60 Hz, $t = 1 \text{ min.}$ 180° sine	3000	V~
M_D	Mounting torque (M4)	1.5-2.0	Nm
		typ.	min.
d_s	Creepage distance on surface	11.2	mm
d_A	Strike distance through air	4.0	mm
Weight	typ.	18	g

Features

- Package with DCB ceramic base plate and soldering pins for PCB mounting
- Isolation voltage over 3000 V~
- Trench Gate
- Enhancement Mode N-Channel Device
- Non Punch through Structure
- High Switching Speed
- Low On-state Saturation Voltage
- High Input Impedance Simplifies Gate Drive
- Latch-Free Operation
- Fully Short Circuit Rated to 10 μs
- Wide RBSOA

Applications

- High Frequency Inverters
- Motor Control
- Switch Mode Power Supplies
- High Frequency Welding
- UPS Systems
- PWM Drives

Caution: These Devices are sensitive to electrostatic discharge. Users should observe proper ESD handling precautions.

Symbol	Test Conditions	Characteristic Value	
		typ.	max.
I_{CES}	$V_{CE} = V_{CES}, V_{GE} = 0 \text{ V}, T_{VJ} = 25^\circ\text{C}$	0.2	mA
	$T_{VJ} = 125^\circ\text{C}$	1	mA
I_{GES}	$V_{CE} = 0 \text{ V}, V_{GE} = \pm 20 \text{ V}$	500	nA
$V_{CE(sat)}$	$I_C = 25 \text{ A}, V_{GE} = 15 \text{ V}, T_{VJ} = 25^\circ\text{C}$	1.9	V
	$T_{VJ} = 125^\circ\text{C}$	2.1	V
$V_{GE(th)}$	$I_C = 25 \text{ A}, V_{GE} = V_{CE}$	7	V
$t_{d(on)}$		170	ns
t_r	Inductive load, $T_{VJ} = 125^\circ\text{C}$	17	ns
$t_{d(off)}$	$V_{CE} = 50\% V_{CES}, I_C = 25 \text{ A}$	340	ns
t_f	$R_G = 5 \Omega, V_{GE} = \pm 15 \text{ V}$	60	ns
E_{on}		2	mJ
E_{off}		3.5	mJ
C_{ies}	$V_{CE} = 75 \text{ V}, V_{GE} = 15 \text{ V}, f = 1 \text{ MHz}$	8000	pF
C_{oes}	$V_{CE} = 75 \text{ V}, V_{GE} = 15 \text{ V}, f = 1 \text{ MHz}$	340	pF
C_{ies}	$V_{CE} = 75 \text{ V}, V_{GE} = 15 \text{ V}, f = 1 \text{ MHz}$	50	pF
V_{FM}	$I_F = 25 \text{ A}, T_{VJ} = 25^\circ\text{C}$	1.9	V
	$T_{VJ} = 125^\circ\text{C}$	1.92	V
t_{rr}	$I_F = 25 \text{ A}, di_{RR} / dt = 200 \text{ A}/\mu\text{s},$	90	ns
I_{RRM}	$V_R = 50\% V_{RRM}$	12	A
NTC	25°C	470	
kΩ			

Package style and outline

Dimensions in mm (1mm = 0.0394")

