
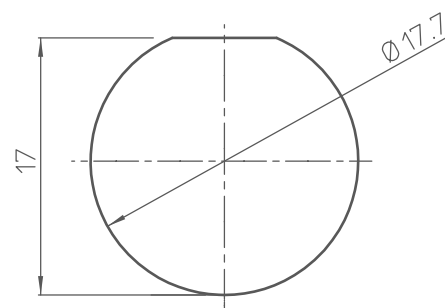
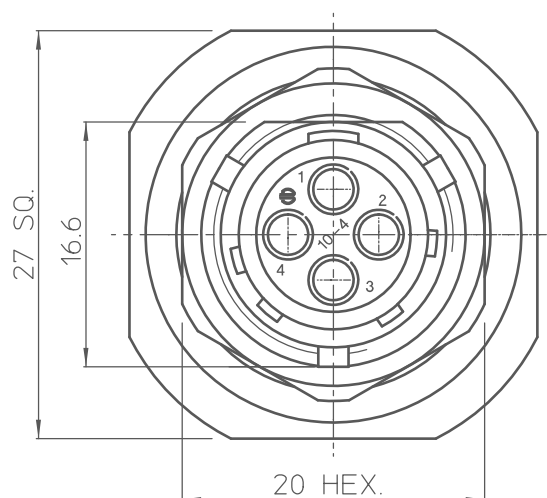


THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

REV.	DATE	DESCRIPTION	BY	C 'K 'D '
01	19-04-02	NUT-MATERIAL MODIFIED	NL	
02	22.05.02	DRILL .PATTERN+POST CHAMF .ADDED	NL	

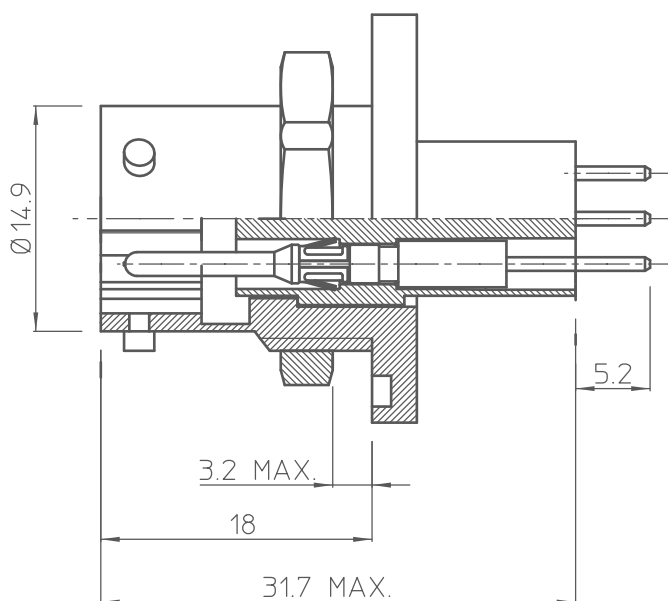

PANEL CUT OUT

Material :


Insert : Reinforced PPS (polyphenylene) Black.
Shell : Aluminum Alloy (Bright tin plated).
Contact marking: Silk screen - white
Nut : Aluminum alloy (Bright tin plated)

Performance Characteristics :

Operating temperature : - 55°C to + 125°C.
Insulating resistance : 5000 M Ω (min).
Test potential : 2000 VAC(eff).

Note :

Connector equipped with male contacts RM20M12E8K.



DRILLING PATTERN

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90																	
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88
1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN		APPR.		DATE		SIGN.		BULKHEAD REC. SIZE 10 WITH PIN CONTACTS																							
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.		DRAFT		11-04-02		N. LEENAERT		CAT. No. UTO7104P21E8T																							
		CHECKED						A FCI FCI MECHELEN N.V. A. SPINOYSTRAAT 8, 2800 MECHELEN SCALE 2 : 1																							
		PR.D. MGR.																													
ALL DIMENSIONS IN MM		PR.ENG. MGR.						BS,A , 202332,002,02 DRAWING NR. CUSTOMER DRAWING																							
		PR. MGT. MGR.																													
ALLE AFMETINGEN IN MM		REFERENCES / REFERENTIES																													