
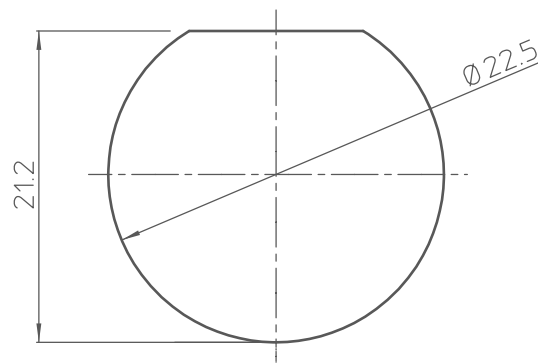
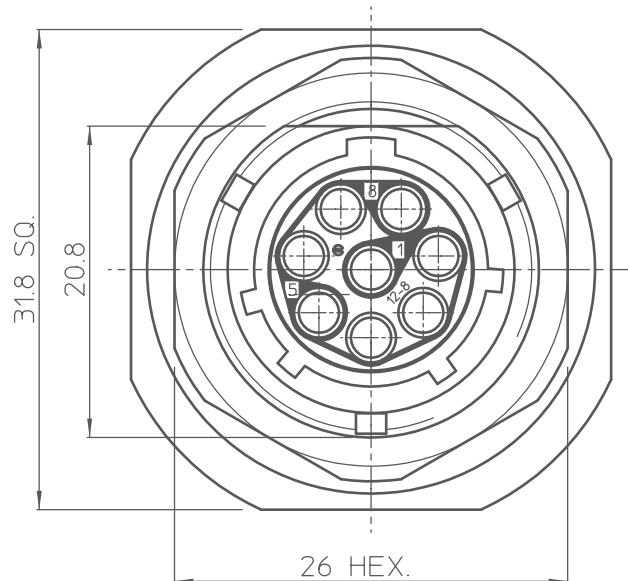


DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEMAAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENDING VERPLICHT.


THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

BS,A , 202332,003,02

REV.	DATE	DESCRIPTION	BY	C'K'D'
01	19-04-02	NUT MATERIAL MODIFIED	NL	
02	22.05.02	DRILL PATTERN+POST CHAMF. ADDED	NL	

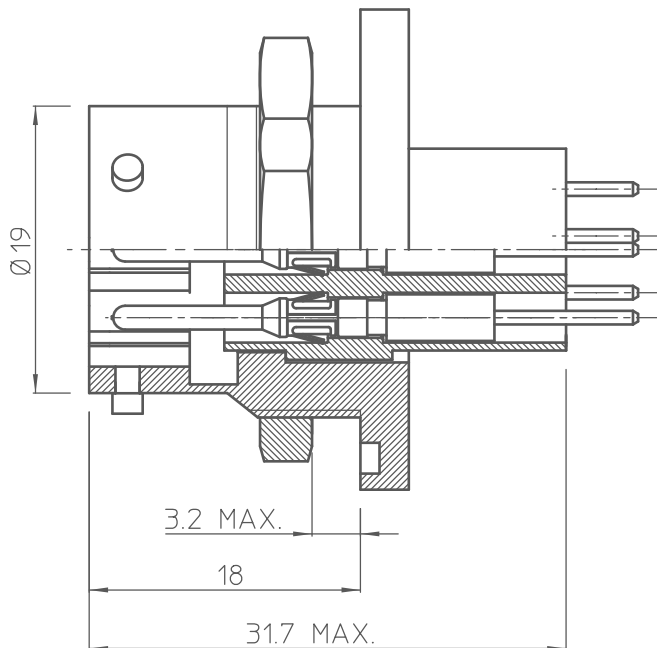

PANEL CUT OUT

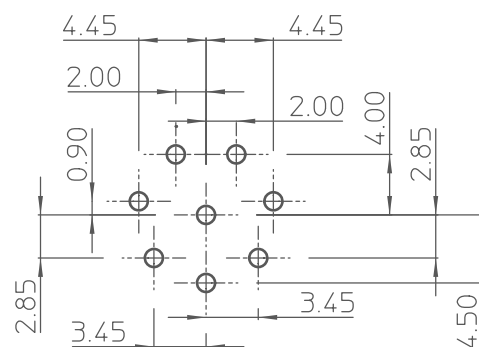

DRILLING PATTERN

Material :

Insert : Reinforced PPS (polyphenylene) Black.
Shell : Aluminum Alloy (Bright tin plated).
Contact marking: Silk screen - yellow
Nut : Aluminum alloy (Brigh t tin plated)

Performance Characteristics :

Operating temperature : - 55°C to + 125°C.
Insulating resistance : 5000 M Ω (min).
Test potential : 2000 VAC(eff).

Note :

Connector fully equipped with male contacts RM20M12E8K

GEN. ST.		01		02		03		04		05		06		07		08		0D		50		60		70		80		90				
INT. ST.		10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88
1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN				APPR.		DATE		SIGN.		BULKHEAD REC. SIZE 12 WITH PIN CONTACTS																						
				DRAFT		12-04-02		N. LEENAERT		CAT. No. UTO7128P21E8T																						
				CHECKED																												
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.				PROD. MGR.						A FCI FCI MECHELEN N.V. A. SPINOYSTRAT 8, 2800 MECHELEN												SCALE										
				PR. ENG. MGR.																												
				PR. MGT. MGR.																				2 : 1								
ALL DIMENSIONS IN MM				REFERENCES / REFERENTIES								BS,A , 202332,003,02 DRAWING NR. CUSTOMER DRAWING																				
ALLE AFMETINGEN IN MM																																
 																																