
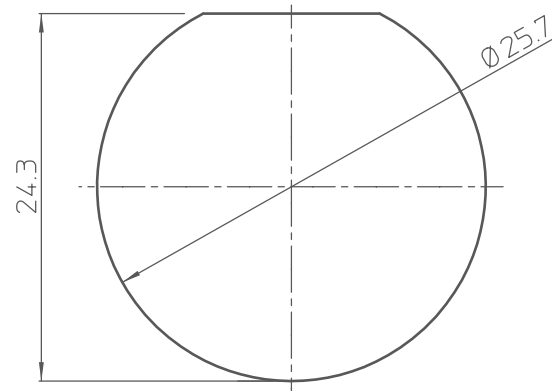
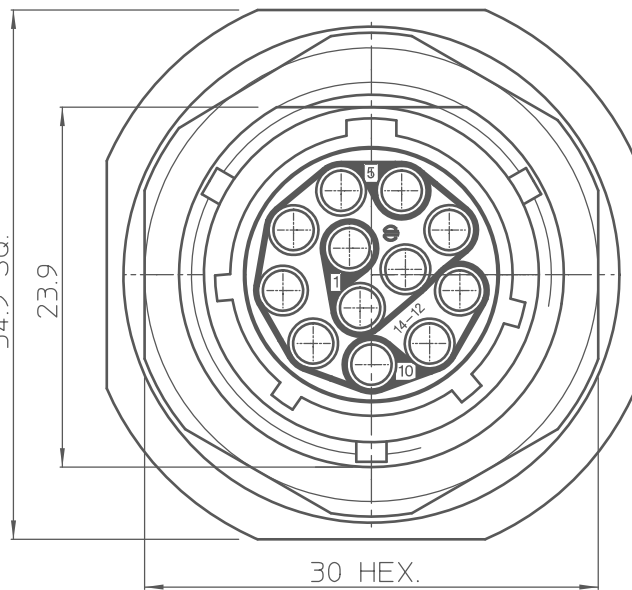


DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEMAAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENDING VERPLICHT.


THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

BS,A , 202332,006,03

REV.	DATE	DESCRIPTION	BY	C'K'D'
01	19-04-02	NUT MATERIAL MODIFIED	NL	
02	22-05-02	DRILL PATTERN+POST CHAMF. ADDED	NL	
03	03-10-02	pick-out length post added	PB	

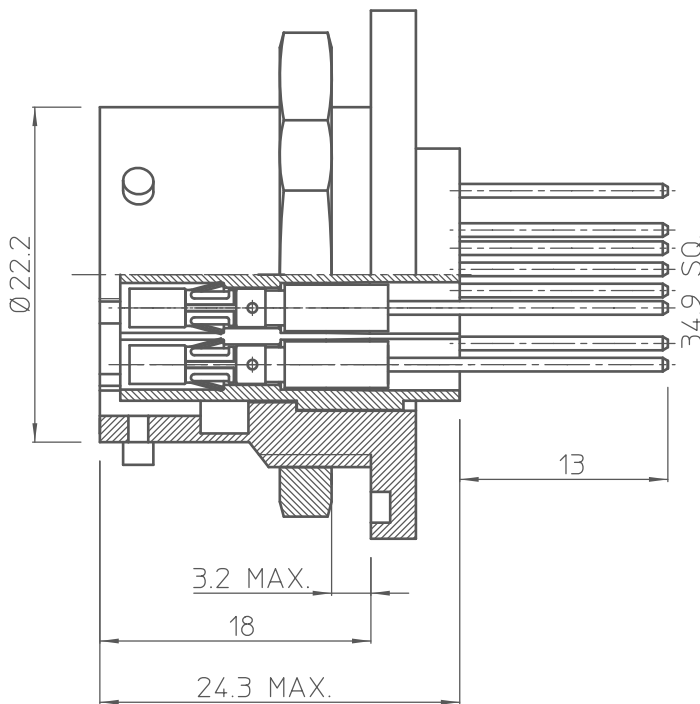

PANEL CUT OUT

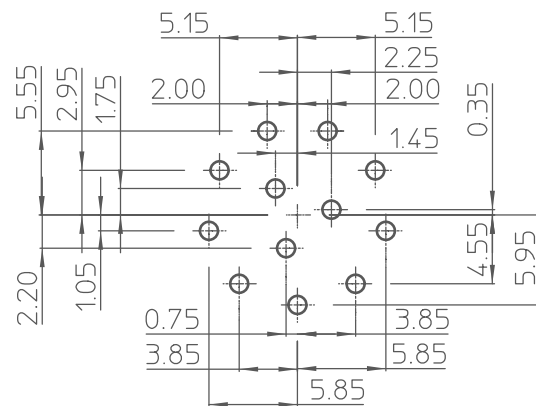

DRILLING PATTERN

Material :

Insert : Reinforced PPS (polyphenylene) Black.
Shell : Aluminum Alloy (Bright tin plated).
Contact marking: Silk screen - yellow
Nut : Aliminum alloy (Brigh tin plated)

Performance Characteristics :

Operating temperature : - 55°C to + 125°C.
Insulating resistance : 5000 Mn(min).
Test potential : 2000 VAC(eff).

Note :

Connector equipped with female contacts RC20M12E84K.

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90																	
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88
1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN		APPR.		DATE		SIGN.		BULKHEAD REC. SIZE 14 WITH SOCKET CONTACTS																							
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.		DRAFT		15-03-02		N. LEENAERT		CAT. No. UTO71412S21E84T																							
		CHECKED						A FCI FCI MECHELEN N.V. A. SPINOYSTRAAT 8, 2800 MECHELEN																							
		PROD. MGR.																													
		PR.ENG. MGR.																													
ALL DIMENSIONS IN MM		PR. MGT. MGR.						SCALE 2 : 1																							
ALLE AFMETINGEN IN MM																															
		REFERENCES / REFERENTIES																													
		BS , A , 202332 , 006 , 03																													
		DRAWING NR. CUSTOMER DRAWING																													