


# C60N/H miniature circuit breakers Multi 9 Merlin Gerin

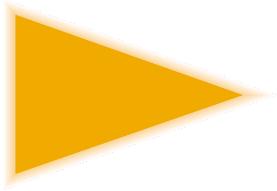

The C60N circuit-breaker is a miniature circuit-breaker used for the protection of circuits in industry and the tertiary sector.

It ensures the following functions: protection against short-circuit and overload currents, isolation, protection of persons against indirect contact.

## Operation


- 1 to 4-pole circuit-breakers.
- Control and protection:
  - B curve: against circuit overcurrents including protection of persons for longer cables than with C curve types,
  - C curve: against the overcurrents of circuits feeding conventional loads,
  - D curve: against the current of installations containing loads with high inrush currents (motors, transformers).



## Advantages

- Conformity with national and international standards:  
AS/NZS 4898 (EN 60 898).
- Ratings from 1 to 63 A.
- Breaking capacity of 6 000/10 000 A under 240/415 V for C60N/H.
- Clip-on electrical auxiliaries and add-on accessories.

## The range

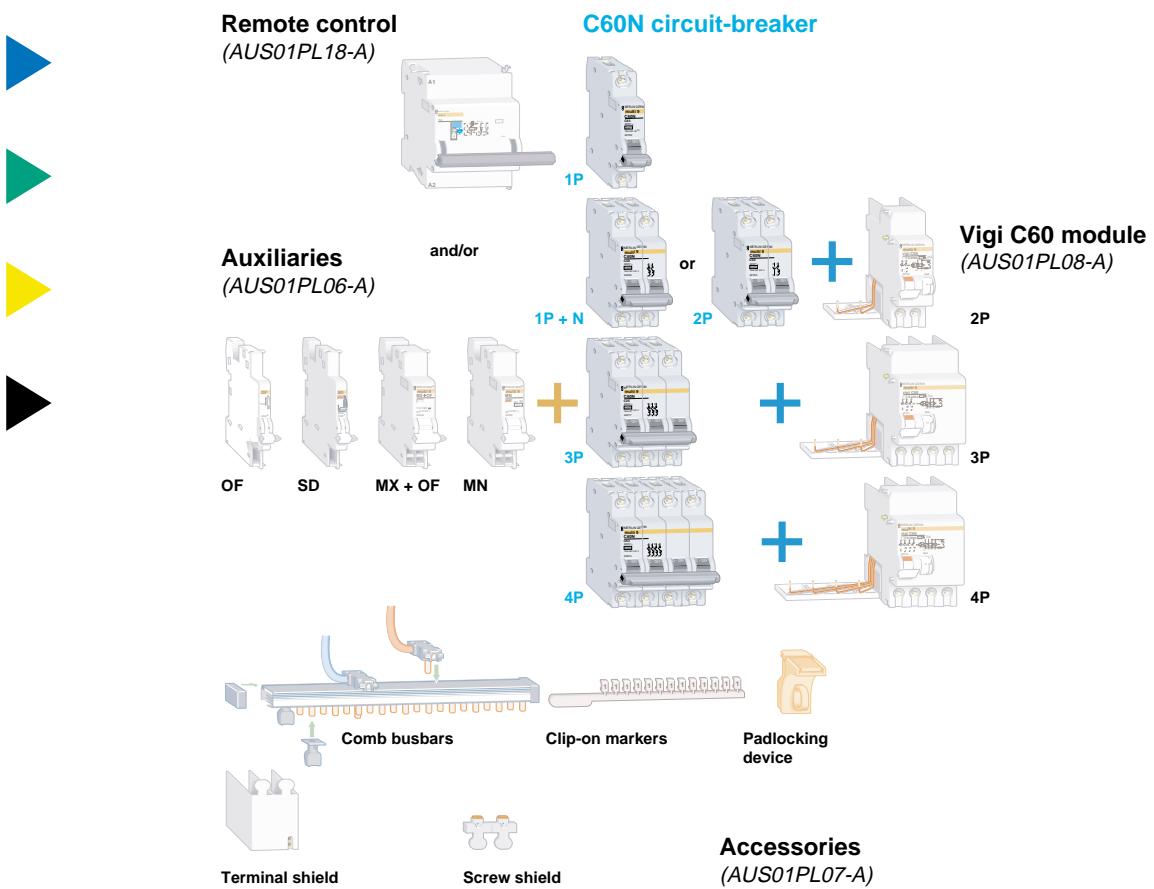


### SELECTION TABLE

type	rating (A)	catalogue number
<b>C curve C60N</b>		
<b>1P</b>	1	25797
	2	25798
	4	25800
	6	25801
	10	25802
	16	25803
	20	25804
	25	25805
	32	25806
	40	25807
	50	25808
	63	25809
<b>2P</b>	1	25811
	2	25812
	4	25814
	6	25815
	10	25816
	16	25817
	20	25818
	25	25819
	32	25820
	40	25821
	50	25822
	63	25823
<b>3P</b>	1	25825
	2	25826
	4	25828
	6	25829
	10	25830
	16	25831
	20	25832
	25	25833
	32	25834
	40	25835
	50	25836
	63	25837
<b>C60H</b>		
<b>1P</b>	1	25839
	2	25840
	4	25841
	6	25842
	10	25843
	16	25844
	20	25845
	25	25846
	32	25847
	40	25848
	50	25849
	63	25850
<b>2P</b>	1	25852
	2	25853
	4	25854
	6	25855
	10	25856
	16	25857
	20	25858
	25	25859
	32	25860
	40	25861
	50	25862
	63	25863
<b>3P</b>	1	25865
	2	25866
	4	25867
	6	25868
	10	25869
	16	25870
	20	25871
	25	25872
	32	25873
	40	25874
	50	25875
	63	25876
<b>4P</b>	1	25878
	2	25879
	4	25880
	6	25881
	10	25882
	16	25883
	20	25884
	25	25885
	32	25886
	40	25887
	50	25888
	63	25889

### IMPLEMENTATION

- Designed for installation in modular enclosures and switchboards.
- Easy mounting on symmetrical rail.
- Easy connection using serrated tunnel terminals with flap.
- Captive screws with mixed +/- indent.
- Simplified clip-on combination of circuit-breaker with auxiliaries.
- Use of comb busbars to simplify circuit-breaker connection.



### TECHNICAL DATA

#### Electrical data

C60N rating (A)	number of poles	voltage (VAC)	breaking capacity (A)
1 to 63	1P 2P, 3P,	230 to 240 400 to 415	6 000 6 000

C60H rating (A)	number of poles	voltage (VAC)	breaking capacity (A)
1 to 63	1P 2P, 3P, 4P	230 to 240 400 to 415	10 000 10 000

- limitation class (EN 60 898): 3,
- fast closing: increased withstand to the high inrush currents of certain loads,
- isolation with positive break indication: opening is indicated by a green strip on the device's control toggle.

This indicates that all poles are open.

#### Tripping curves:

- B curve:  
magnetic releases operate between 3 and 5 In.
- C curve:  
magnetic releases operate between 5 and 10 In.
- D curve:  
magnetic releases operate between 10 and 14 In.

#### Mechanical data

- Connection by tunnel terminals for the following cables:
  - 16 mm<sup>2</sup> flexible or 25 mm<sup>2</sup> stranded for up to 25 A ratings,
  - 25 mm<sup>2</sup> flexible or 35 mm<sup>2</sup> stranded for ≥32 A ratings.
- Durability: 20 000 cycles (O-C).
- Dimensions (w x h x d mm): 18 x N (number of poles) x 81 x 70.
- Weight (g): 1P: 120, 240, 2P: 240, 3P: 360, 4P: 480.

### ENVIRONMENT

- Tropicalisation: treatment 2 (relative humidity: 95 % at 55C).
  - Degree of protection:
    - of enclosure: IP 40,
    - of terminals: IP 20.
  - Operating temperature:
    - 5C to +60C.
  - Storage temperature:
    - 40C to +100C.



Approval No: N13634

### SCHNEIDER ELECTRIC HELP CENTRE

Tel: 1300 369 233

Fax: 1300 369 288

Email: [help@schneider.com.au](mailto:help@schneider.com.au)

[www.schneider-electric.com.au](http://www.schneider-electric.com.au)

AUS01PL04-A